

ENT.A60 – ENT.A60T Series Current Transformers Datasheet



DESCRIPTION

Sealable model 'A Series' current transformers in the primary current range of 500A - 2000A.

APPLICATION

Used to convert primary currents from 60x30 mm busbars or cables with a diameter of 52 mm into secondary currents of 1A or 5A.

TECHNICAL SPECIFICATIONS

- Compliant with TS EN 61869-2 / IEC 61869-2 standards
- Maximum Operating Voltage (Un) 720V
- Operating Temperature -5°C...+40°C
- Rated power range 5-15 VA
- Rated Continuous Thermal Current 1.2xIn




A60								5A SECONDARY	
	Class 0,2S				Class 0,2			Class 0,5	
VA	2,5	5	7,5	10	7,5	10	15	10	15
250A	M5735								
300A	M5736								
400A	M5737								
500A	M5738								
600A		M5739						M4670	
750A		M5740			M5193			M4504	
800A			M5741			M5191		M4452	
1000A				M5742		M5190		M4453	M4505
1200A				M5189			M5188	M4506	M4588
1250A				M5187				M4507	M4508
				M5743					
1600A				M5744					

A60T				5A SECONDARY	
	Class 0,5				
VA	5	10	15		
500A	M4278				
600A	M4279				
750A	M4280				
800A		M4281			
1000A		M4282			
1200A		M4283			
1250A		M4284			
1600A				M4287	
2000A				M4304	

Please contact us for products with a 1A secondary current.

ENT.A60

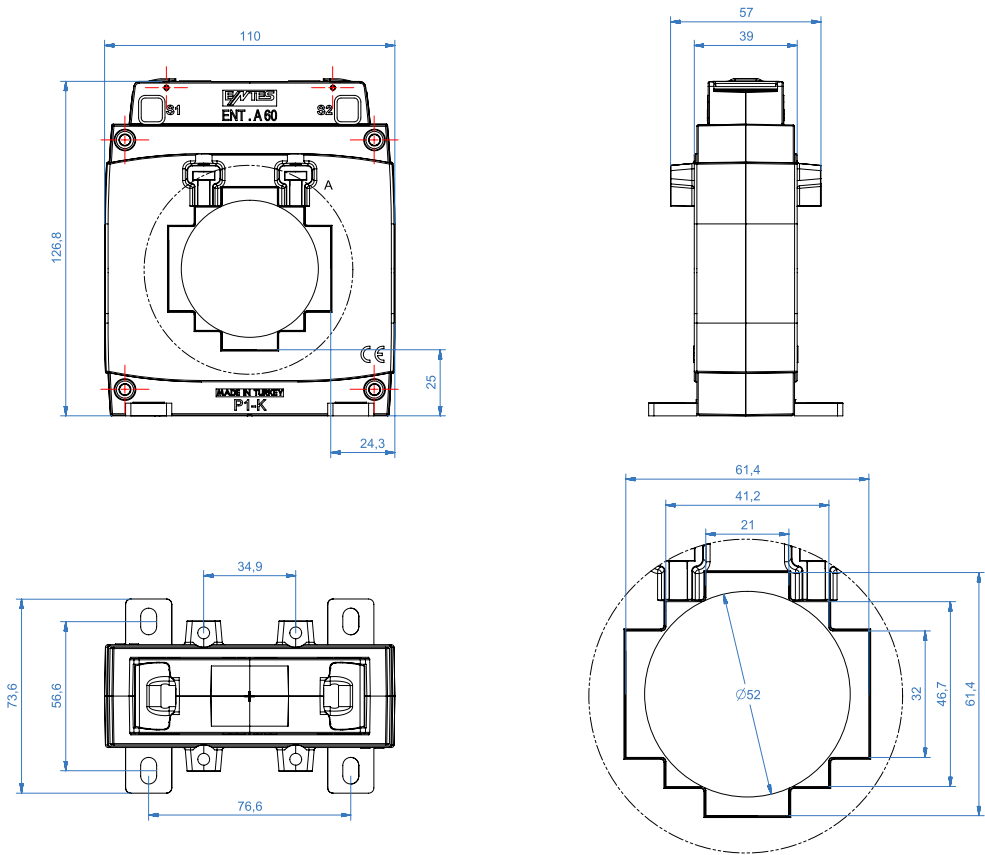

ENT.A60T

