



Measurement & Control Instruments

Process Control
Temperature Control
Heating Cooling
Counters
Timers

Process Controllers

"Smart I/O Module" System
RS-232/485 Modbus RTU Serial Communication



ESM-4450 ESM-4950
ESM-7750 ESM-9450 ESM-9950




- ▶ 8 steps profile control (Ramp & Soak) function and start-hold-stop by using logic input module
- ▶ For process value and process control Retransmission feature
- ▶ Detection of heater failure by using 0...5Aadc CT input module

- ▶ Universal process input (TC, RTD, mVdc, Vdc, mA)
- ▶ Bumpless transfer
- ▶ Motorized valve control function

Specifications

4 Digits process (PV) and 4 Digits set (SV) display
Programmable heating, cooling and alarm functions for control outputs
Auto-tune and Self-tune PID
Dual or multi point calibration for dc Voltage/Current input
Configurable ON/OFF, P, PI, PD, and PID control forms

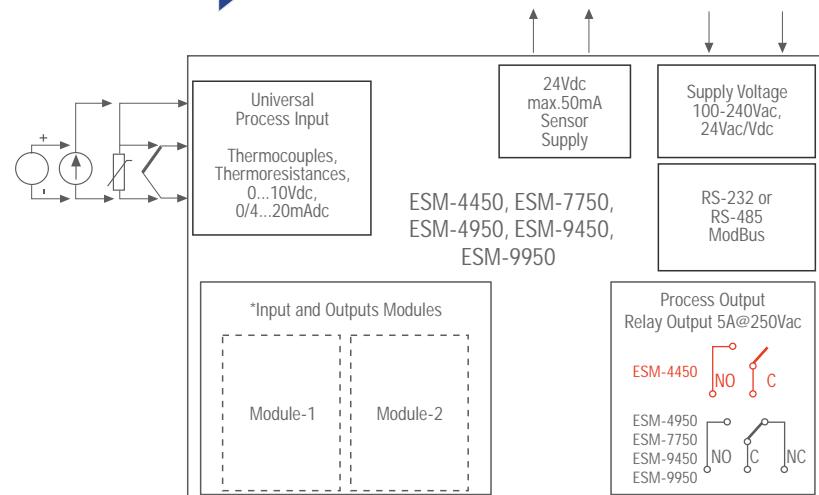


* Input and output modules can be mounted each module sockets.

* Only one analog input module can connect to the device at the same time.



Technical Specification

Accuracy: $\pm 0.25\%$ of full scale for thermocouple, thermoresistance, mV, V $\pm 0.70\%$ of full scale for mA input
Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$
Line Compensation: Maximum 10 Ohm
Sensor Break Protection: Upscale
Sampling Cycle: 3 samples per second
Input Filter: 0.0 to 900.0 seconds

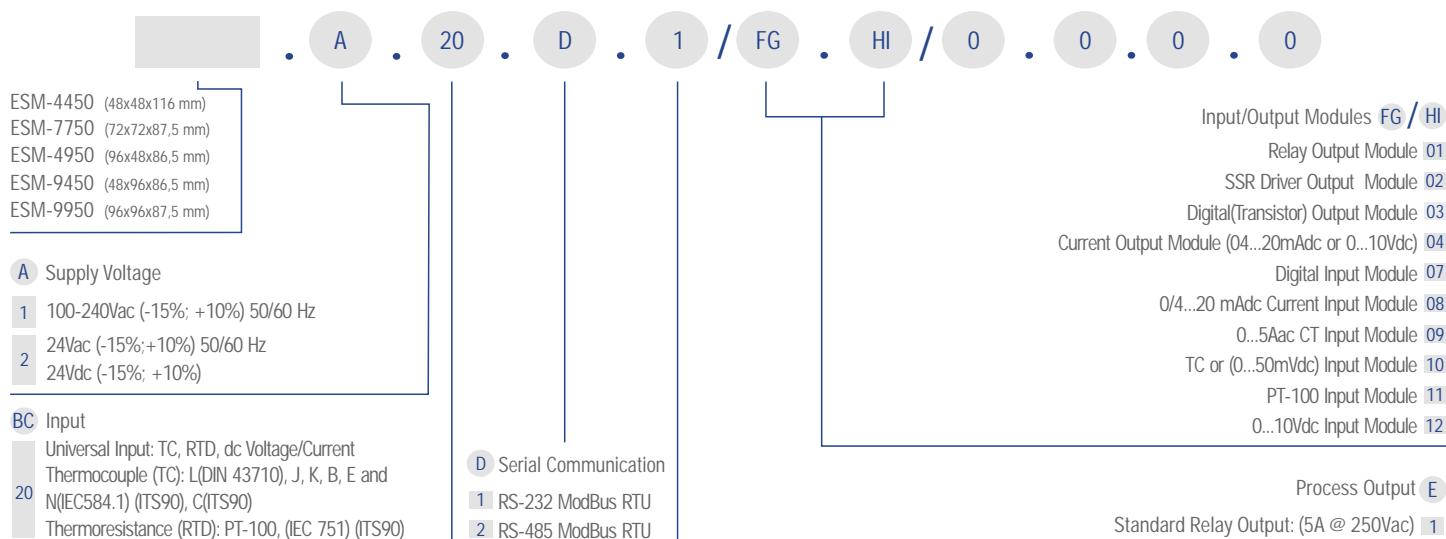

Process Controllers

Universal Input Dual SET PID

ESM-7730 ESM-4430
ESM-9930 ESM-9430 ESM-4930





- ▶ Auto-tune and Self-tune PID
- ▶ Bumpless transfer
- ▶ Dual or multi point calibration for dc Voltage/Current input

Specifications

4 Digits process (PV) and 4 Digits set (SV) display
Universal process input (TC, RTD, mVdc, Vdc, mAdc)
Configurable ON/OFF, P, PI, PD, and PID control forms
Manual/Automatic mode selection for control outputs
Programmable heating, cooling and alarm functions for control outputs


Technical Specification

Accuracy: $\pm 0.25\%$ of full scale for thermocouple, thermoresistance, mV, V $\pm 0.70\%$ of full scale for mA input
Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$
Line Compensation: Maximum 10 Ohm
Sensor Break Protection: Upscale
Sampling Cycle: 3 samples per second
Input Filter: 0.0 to 900.0 seconds

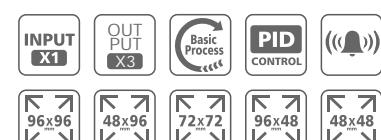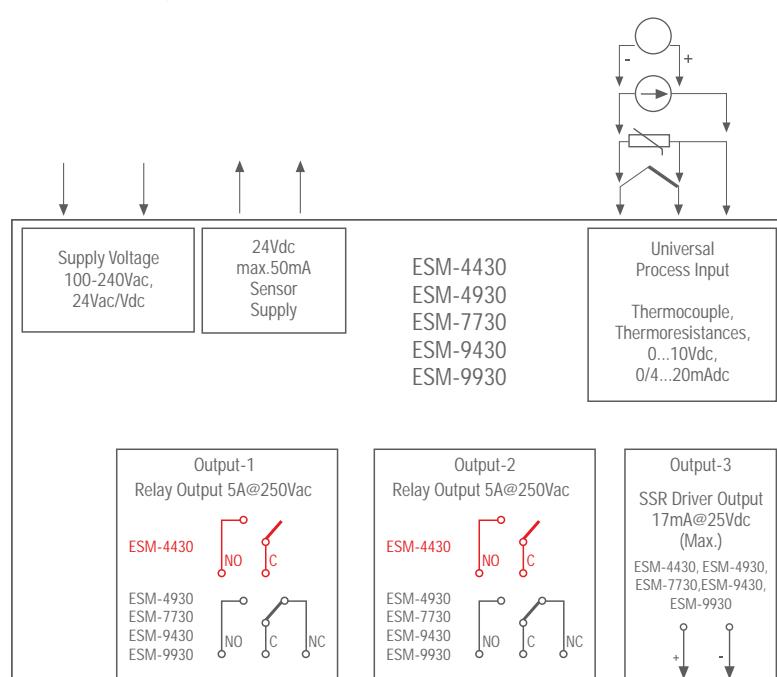

ESM-4430 (48x48x87,5 mm)
ESM-7730 (72x72x87,5 mm)
ESM-9930 (96x96x87,5 mm)
ESM-9430 (48x96x86,5 mm)
ESM-4930 (96x48x86,5 mm)

A Supply Voltage
1 100-240Vac (-15%; +10%) 50/60 Hz
2 24Vac 50/60 Hz (-15%;+10%)
2 24Vdc (-15%; +10%)

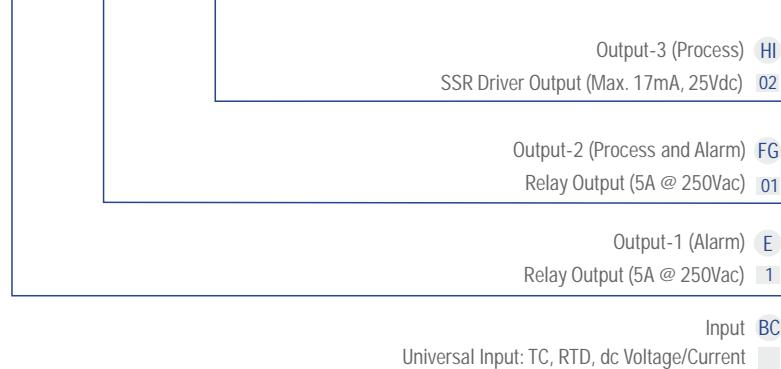



Process Indicators

"Smart Output Module" System RS-232/485
Modbus RTU Serial Communication


ESM-4400 ESM-4900
ESM-7700 ESM-9900




- ▶ Smart Output Module System
- ▶ Dual or multi point calibration for dc Voltage/Current input
- ▶ Retransmission of Process Value or Process Control by using 0/4...20 mA Current Output Module

Specifications

4 Digit process (PV) display
Universal process input (TC, RTD, mVdc, Vdc, mA)
Programmable Alarm functions
RS-232 (standard) or RS-485(Optional) serial communication with Modbus RTU protocol

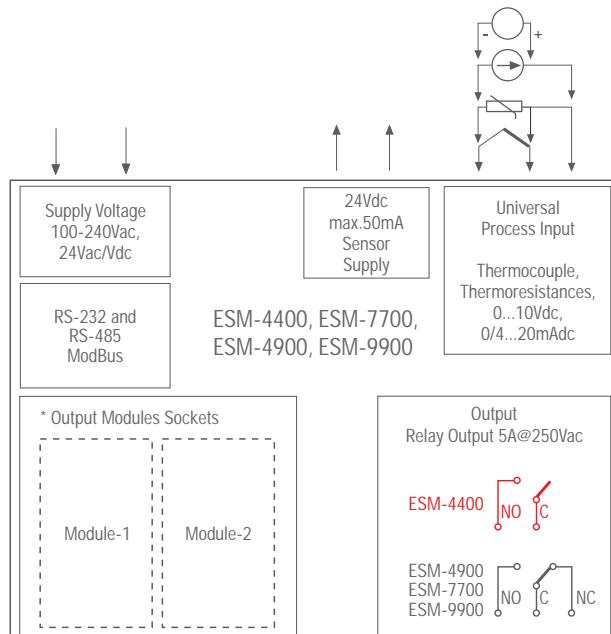

* Output modules can be mounted each modules sockets.

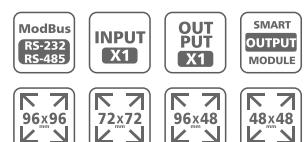

Technical Specification

Accuracy: $\pm 0.25\%$ of full scale for thermocouple, thermoresistance, mV, V $\pm 0.70\%$ of full scale for mA input
Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$
Line Compensation: Maximum 10 Ohm
Sensor Break Protection: Upscale
Sampling Cycle: 3 samples per second
Input Filter: 0.0 to 900.0 seconds



ESM-4400 (48x48x116 mm)
ESM-7700 (72x72x87,5 mm)
ESM-4900 (96x48x86,5 mm)
ESM-9900 (48x96x87,5 mm)

A Supply Voltage
1 100-240Vac (-15%; +10%) 50/60 Hz
2 24Vac (-15%;+10%) 50/60 Hz
2 24Vdc (-15%; +10%)

B Input
Universal Input: TC, RTD, dc Voltage/Current
Thermocouple (TC): L(DIN 43710), J, K, B, E and N(IEC584.1) (ITS90), C(ITS90)
Thermoresistance (RTD): PT-100, (IEC 751) (ITS90)

D Serial Communication
1 RS-232 ModBus RTU
2 RS-485 ModBus RTU

Output Modules FG / HI

None 00

Relay Output Module 01

SSR Driver Output Module (max.26mA @ 22Vdc) 02

Digital (Transistor) Output Module (max.40mA@18Vdc) 03

Current Output Module (04...20mA or 0...10Vdc) 04

Process Output E

Standard Relay Output: (5A @ 250Vac) 1

Process Indicators

ESM-3700-N



CE EAC

- ▶ Adjustable decimal point
- ▶ Maximum and minimum measurement value are registered to the devices memory
- ▶ 5 Stage analog input filter option
- ▶ Maximum or minimum measurement value can be shown continuously on the display

Specifications

4 Digits display

Easily adjustable from front panel

Configurable display scale between -1999 and 9999

Selectable universal process Input

(0-10Vdc, 0-1Vdc, 0-60mVdc, 0-20mAdc, 4-20mAdc)

User can adjust device's reading value for selected input type

Alarm output, Relay or SSR driver output (It must be determined in order)

Adjustable alarm set value from front panel

Programming mode password protection

Installing parameters using ProkeyRemote access, data collecting and controlling with Modbus RTU

Technical Specification

Accuracy: $\pm 0.5\%$ of full scale

Cold Junction Compensation: Automatic $\pm 0.1^\circ\text{C}/1^\circ\text{C}$

Line Compensation: Maximum 10 Ohm



Sensor Break Protection: Upscale

Sampling Time: 240 ms for 4...20 mAdc and 0...20 mAdc process input

130 ms for 0...60 mVdc process Input

100 ms for 0...1 Vdc and 0...10 Vdc process Input

Input filter: 0.0...900.0 selectable between seconds

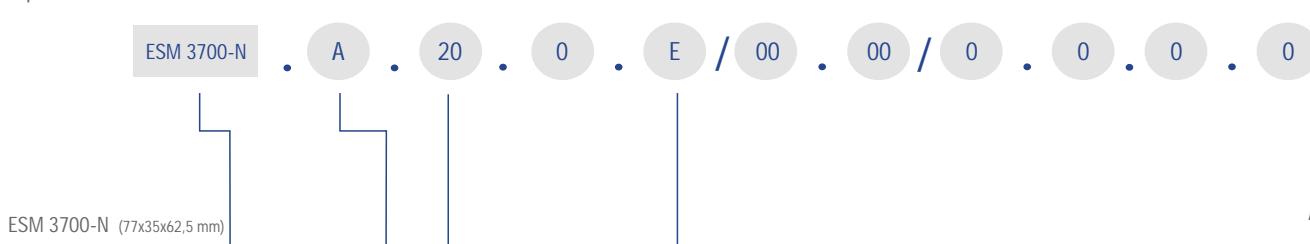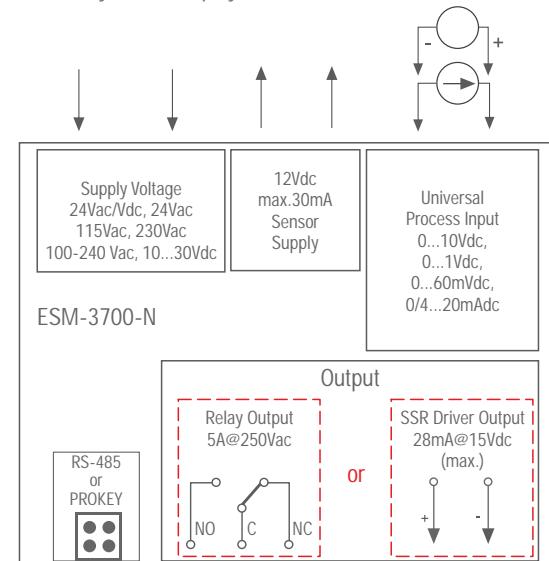

A Supply Voltage

- 1 100-240Vac 50/60Hz
- 2 24Vac/dc (-15%; +10%) 50/60 Hz
- 3 24Vac (-15%; +10%) 50/60 Hz
- 4 115Vac (-15%; +10%) 50/60 Hz
- 5 230Vac (-15%; +10%) 50/60 Hz
- 8 10...30 Vdc

- | | |
|---------------------------------|----|
| Input Type (DC Voltage/Current) | 20 |
| 0...60 mVdc Scale / -1999, 9999 | |
| 0...1 Vdc Scale / -1999, 9999 | |
| 0...10 Vdc Scale / -1999, 9999 | |
| 0...20 mAdc Scale / -1999, 9999 | |
| 4...20 mAdc Scale / -1999, 9999 | |



Process Controllers

Universal Input Dual SET PID


ESM-4435

CE EAC

- Universal process input (TC, RTD, mVdc, Vdc, mAdc)
 - Dual or multi point calibration for dc Voltage/Current input

Specifications

- 4 Digits process (PV) and 4 Digits set (SV) display
- Configurable ON/OFF, P, PI, PD, and PID control forms
- Manual/Automatic mode selection for control outputs
- Programmable heating, cooling and alarm functions for control outputs

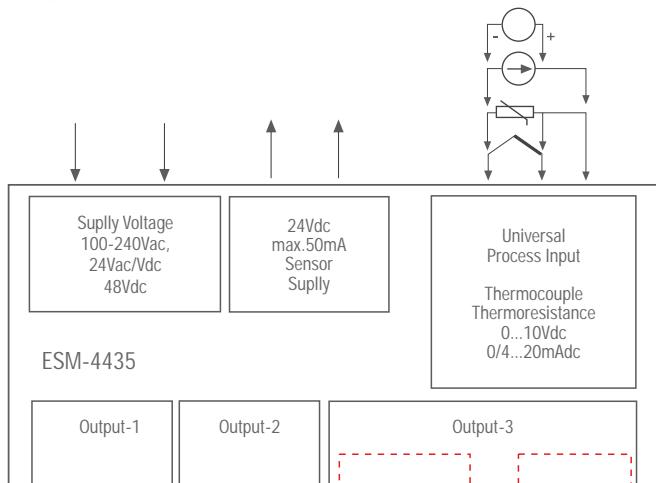

- ## Technical Specification

Accuracy: $\pm 0.25\%$ of full scale for thermocouple, thermoresistance, mV, V $\pm 0.70\%$ of full scale for mA input


Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$

Line Compensation: Maximum 10 Ohm

Sensor Break Protection: Upscale

Sampling Cycle: 3 samples per second

Input Filter: 0.0 to 900.0 seconds

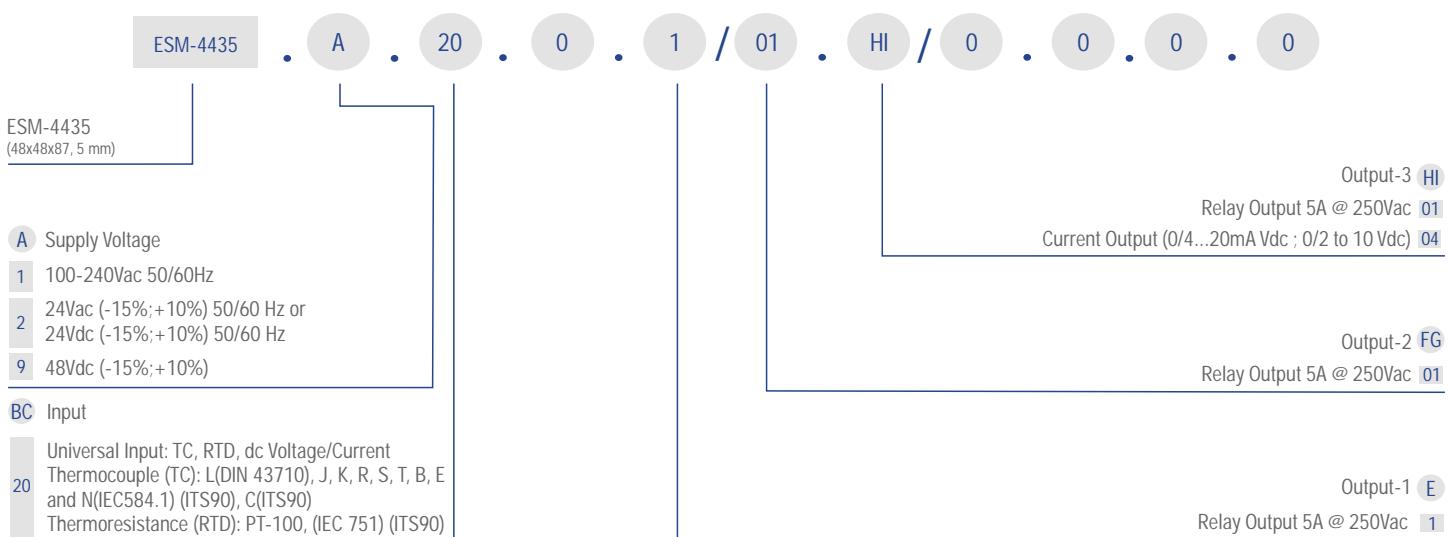

Order Code											
A	BC	D	E	/	FG	HI	/	U	V	W	Z
20	1	/			/	0	0	0	0	0	
A Supply Voltage											
1 100-240Vac 50/60Hz	+	+	+	+	+	+	+	+	+	+	+
2 24Vdc/Vac (-15%,+15%) 50/60Hz	+	+	+	+	+	+	+	+	+	+	+
3 24Vac (-15%,+15%) 50/60Hz	-	-	-	-	-	-	-	-	-	-	+
4 115Vac (-15%,+15%) 50/60Hz	-	-	-	-	-	-	-	-	-	-	+
5 230Vac (-15%,+15%) 50/60Hz	-	-	-	-	-	-	-	-	-	-	+
9 48Vdc (-15%,+10%) 50/60Hz	-	-	-	-	-	-	-	-	-	+	-
BC Input Type											
20 Configurable Universal inputs	+	+	+	+	+	+	+	+	+	+	+
D Serial Communication											
0 None							+	+	+	+	+
1 RS-232 ModBus RTU	+	+	+	+	+	-	-	-	-	+	+
2 RS-485 ModBus RTU	+	+	+	+	+	-	-	-	-	+	+
E Process Output											
0 None											+
1 Relay Output (At resistive load 5A@250Vac)	+	+	+	+	+	+	+	+	+	+	+
2 SSR Driver Output (Max. 20mA@12Vdc)	-	-	-	-	-	-	-	-	-	-	+
FG Input/Output Modules-1											
00 None	+	+	+	+	+					+	+
01 Relay Output	+	+	+	+	+	+	+	+	+	+	+
02 SSR Driver Output (Max. 20mA@12Vdc)	+	+	+	+	+	-	-	-	-	+	+
03 Transistor Output (Max. 40mA@18Vdc)	+	+	+	+	+	-	-	-	-	+	+
04 Analogue (0/4...20mA or 0...10Vdc)	+	+	+	+	+	-	-	-	-	+	+
07 Digital Input	+	+	+	+	+	-	-	-	-	-	-
08 Analogue (0/4...20mA)	+	+	+	+	+	-	-	-	-	-	-
09 CT Input Module (0...5Aac)	+	+	+	+	+	-	-	-	-	-	-
10 Thermocouple Input (0...50mVdc)	+	+	+	+	+	-	-	-	-	-	-
11 Pt-100 Input	+	+	+	+	+	-	-	-	-	-	-
12 Analogue Input (0...10Vdc)	+	+	+	+	+	-	-	-	-	-	-
HI Input/Output Module - 2											
00 None	+	+	+	+	+					+	+
01 Relay Output	+	+	+	+	+	-	-	-	-	+	+
02 SSR Driver Output (Max. 20mA@12Vdc)	+	+	+	+	+	+	+	+	+	+	+
03 Transistor Output (Max. 40mA@18Vdc)	+	+	+	+	+	-	-	-	-	+	+
04 Analogue (0/4...20mA or 0...10Vdc)	+	+	+	+	+	-	-	-	-	+	+
07 Digital Input	+	+	+	+	+	-	-	-	-	-	-
08 Analogue (0/4...20mA)	+	+	+	+	+	-	-	-	-	-	-
09 CT Input Module (0...5Aac)	+	+	+	+	+	-	-	-	-	-	-
10 Thermocouple Input (0...50mVdc)	+	+	+	+	+	-	-	-	-	-	-
11 Pt-100 Input	+	+	+	+	+	-	-	-	-	-	-
12 Analogue Input (0...10Vdc)	+	+	+	+	+	-	-	-	-	-	-
Specifications											
"Smart I/O Modül" system	+	+	+	+	+	-	-	-	-	-	-
"Smart Output Modül" system	+	+	+	+	+	-	-	-	-	+	+
Universal process (TC, RTD, mVdc, Vdc, mA) input	+	+	+	+	+	+	+	+	+	+	+
Bumpless transfer	+	+	+	+	+	+	+	+	+	-	-
Motorized valve control function	+	+	+	+	+	-	-	-	-	-	-
8 steps profile control	+	+	+	+	+	-	-	-	-	-	-
Remote Set point function	+	+	+	+	+	-	-	-	-	-	-
Re-transmission function	+	+	+	+	+	-	-	-	-	+	+
Detection of heater failure by CT input module	+	+	+	+	+	-	-	-	-	-	-
Dimension											
77x35mm DIN	-	-	-	-	-	-	-	-	-	-	+
48x48mm DIN 1/16	+	-	-	-	-	+	-	-	-	+	+
96x48mm DIN 1/8	-	+	-	-	-	-	+	-	-	-	+
72x72mm DIN	-	-	+	-	-	-	-	+	-	-	+
48x96mm DIN 1/8	-	-	-	+	-	-	-	-	+	-	-
96x96mm DIN 1/4	-	-	-	-	+	-	-	-	+	-	+



Profile Control


ESM-9990

CE EAC

- Universal process input (TC, RTD, mVdc, Vdc, mAdc)
- In ceramic furnace applications
- 8-step Profile Control (Ramp and Soak) and Start-Pause-Stop functions
- Textile, paint, ceramic oven applications


Specifications

4 Digits proses (PV) ve 4 Digits set (SV) göstergesi
 Hardware configuration with SSR and Current output module
 Configurable ON/OFF, P, PI, PD and PID control forms
 Heating function for control outputs
 8 steps profile control (Ramp & Soak) function and Start-Pause-Stop
 Power Down Back-up

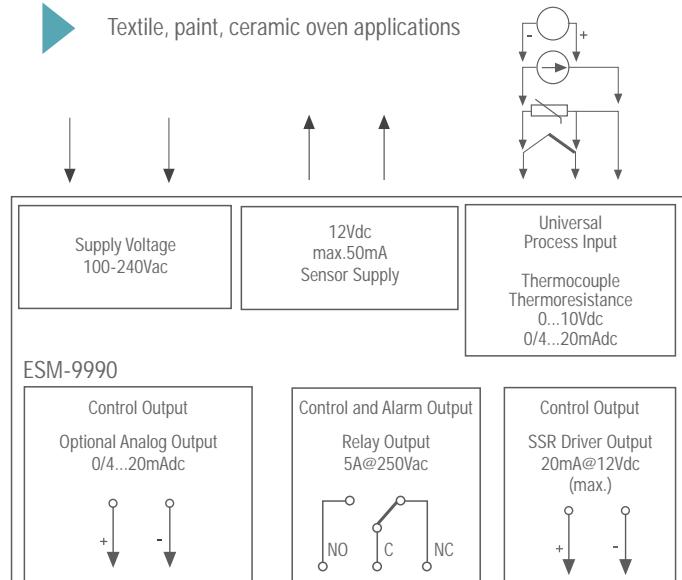

Technical Specification

Accuracy: $\pm 0,25\%$ of FS for thermocouple
 Cold Junction Compensation: Automatically $\pm 0,1^\circ\text{C}/1^\circ\text{C}$.
 Sensor Break Protection: Upscale
 Sampling Cycle: 3 samples per second

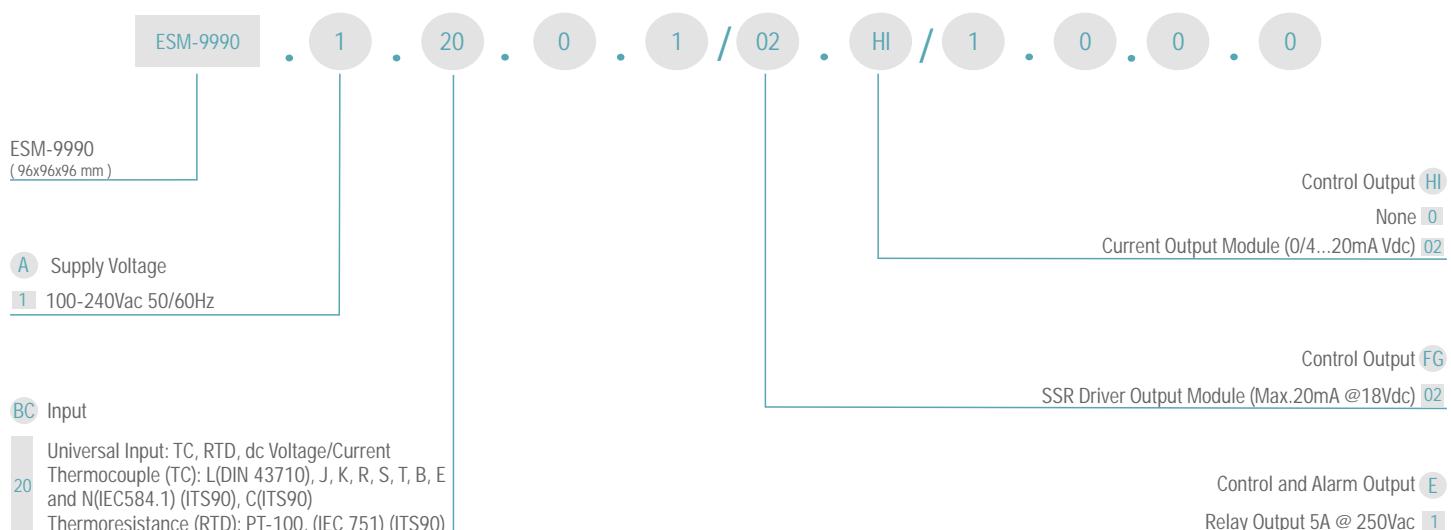

Digital Potentiometer

EPM-3790N / EPR-3790N



EPM-3790N

Forward, Reverse direction outputs and error input
for V/F Speed Controller

EPR-3790N

Fault input or (Remote start-stop)

Specifications

Operation at Adjustable Set Value

Ramp Function

Economical

Easy to User

4 Digits Display

Easily adjustable set value from front panel

Configurable display scale between -1999 and 9999

Adjustable decimal point

Set value low limit and set value high limit boundaries

Adjustable ramp up and ramp down time

0/2...10Vdc Voltage output or 0/4...20mA Current output

(It must be determined in order.)

Password protection for programming and adjustment sections



Technical Specification

Digital Input: Error input (max. 3mA@30Vdc)

Resolution: 12 bits

Fluctuation: Max. 30 mV

Scale: Between-1999 and 9999

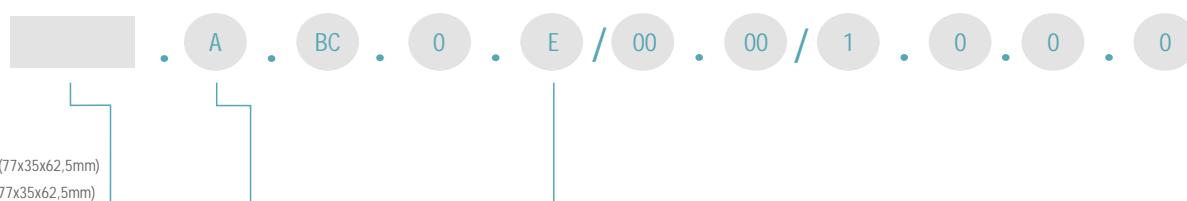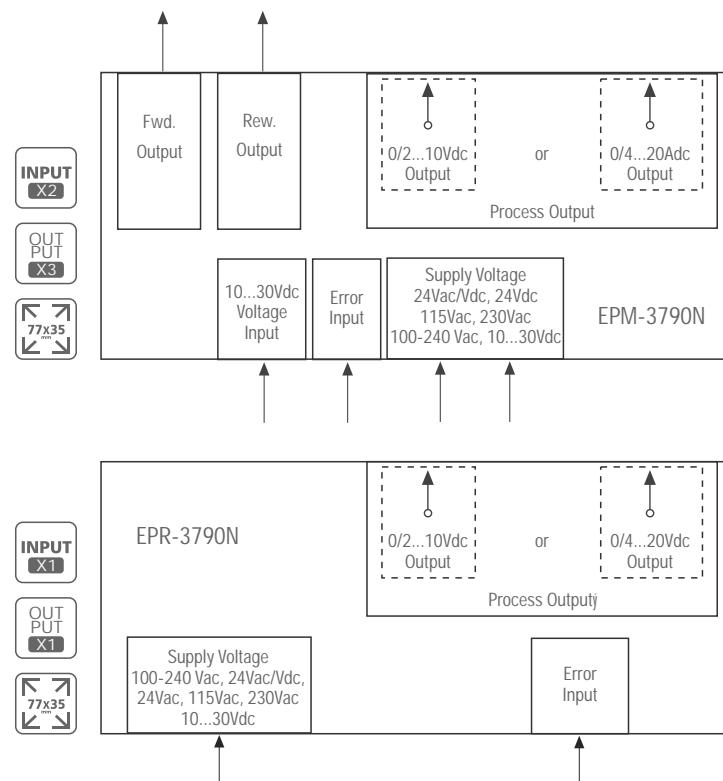

EPM-3790N (77x35x62,5mm)
EPR-3790N (77x35x62,5mm)

- A Power Supply
- 1 100-240Vac 50/60Hz
- 2 24Vac/dc ($\pm 15\%$) 50/60Hz
- 3 24Vac ($\pm 15\%$) 50/60Hz
- 4 115Vac ($\pm 15\%$) 50/60Hz
- 5 230Vac ($\pm 15\%$) 50/60Hz
- 8 10 - 30Vdc



8 Channel Scanner

Channel 8N - Channel 8AN



- 320 x 240 Pixel TFT LCD screen
- 3 Different alarm and pre-alarm types for each channel
(High, Low and Band Alarms)


Specifications

- 8 Analogue inputs
- 8 PT-100 input with two wires
- ON-OFF control
- Sensor error detection
- Adjustable offset
- User defined channel labels
- Display scan modes
- Relay outputs
- Data Logging to USB Flash Memory
- Adjustable data logging time interval
- Password protection for programming mode

Technical Specification

- Accuracy: $\pm 0,25\%$ of full scale
- Line Compensation: Maximum 10 Ohm
- Sensor Break Protection: Upscale
- Sampling Time: 400msecs

- ModBus RTU communication protocol
(RS-232, RS-485 and Ethernet communication)
- Operating with Real Time Clock (RTC)

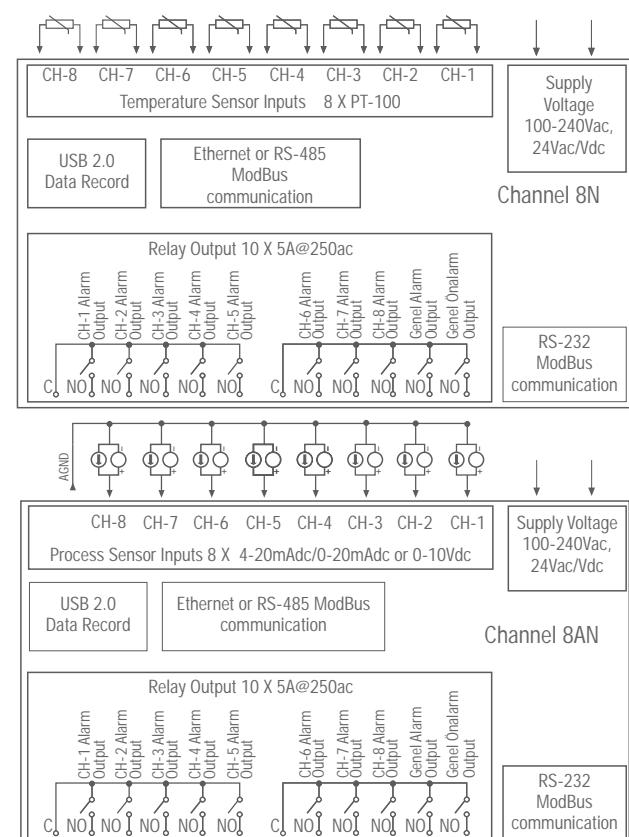

Channel 8N (96x96x96 mm)
Channel 8AN (96x96x96 mm)

- A** Supply Voltage
- 1** 100-240Vac 50/60 Hz (-15%; +10%)-6VA Universal
- 2** 24Vac 50/60 Hz (-15%;+10%) 24Vdc (-15%; +10%)

- B** Outputs
- 10 Relay outputs with 2 common
for each NO contact 5A max. (5A@250V at resistive load)
for each Common contact 15A max (15A@250V at resistive load)

Optional Communication-2 **E**

None **0**

USB (USB2.0 "for temperature data logging") **U**

Optional Communication-1 **D**

None **0**

RS-485 (up to 115200 baudrate, "500VAC isolation") **4**

ETHERNET (10Mbit/s, "1500VAC isolation") **E**

Standard Serial Communication **C**

USB (USB2.0 "for temperature data logging") **2**

4 Zone PID Control

PID QUADRO




- ▶ Auto-Tuning and Self-Tuning (Automatic calculations of PID parameters)
- ▶ Data Logging to USB Flash Memory

- ▶ Soft-Start (Ramp action during power on) specification
- ▶ 3 Different alarm types for each channel (High, Low and Band Alarms)

Specifications

128 x 64 Graphical LCD display
4 Thermocouple (J, K, L, R or S type) sensor inputs
Configurable P, PI, PD and PID control forms
Relay outputs
Sensor error detection
Adjustable temperature offset for each channel
User defined channel labels
Operating with Real Time Clock (RTC)
ModBus RTU communication protocol (RS-232, RS-485 and Ethernet communication)
Adjustable data logging time interval
Password protection for programming mode

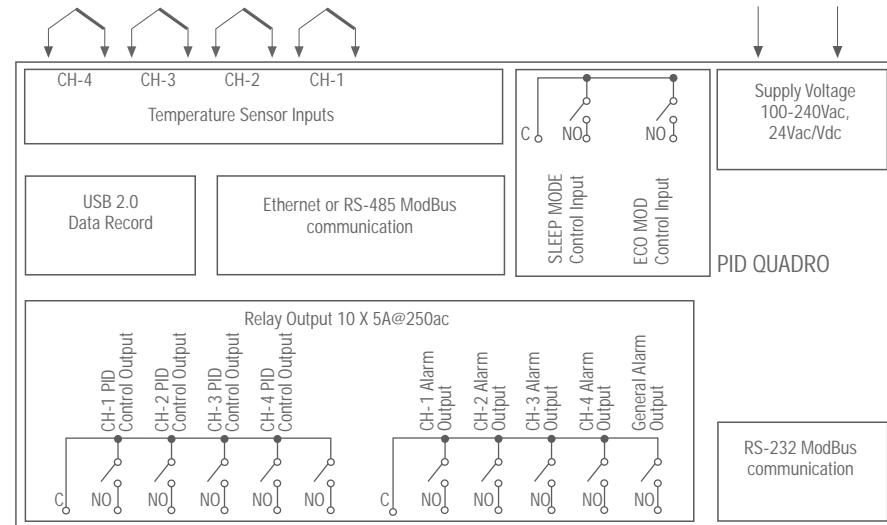

Technical Specification

Accuracy: $\pm 0,25\%$ of full scale
Line Compensation: Maximum 10 Ohm
Sensor Break Protection: Upscale
Sampling Time: 1400msecs



PID QUADRO (96x96x96 mm)

PID QUADRO

A . B . C . D . E

Optional Communication-2 E

None 0

USB (USB2.0 'for temperature data recording') U

Optional Communication-1 D

None 0

RS-485 (maximum 115200 baudrate, '500VAC isolation') 4

ETHERNET (10Mbit/s, '1500VAC isolation') E

Standard Serial Communication C

RS-232 (maximum 115200 baudrate, 'isolation') 2

A Supply Voltage

- 1 100-240Vac 50/60 Hz (-15%; +10%)-6VA Universal
- 2 24Vac 50/60 Hz (-15%;+10%) 24Vdc (-15%; +10%)

B Outputs

- 10 Relay outputs with 2 common
for each NO contact 5A max. (5A@250V at resistive load)
for each Common contact 15A max (15A@250V at resistive load)



Temperature and Humidity Controller

ESM-3723



CE EAC

- Temperature Sensor Input
(NTC, PTC, PT-100 and ProNem Mini PMI-P)
- Auto-Tune PID
- Humidity Sensor Input
(0/2..10V, 0/4..20mA or ProHumidity Mini PMI-D)
- 4 Digits Temperature and 4 Digit Humidity Display


Specifications

Heating Control Output, Heating Alarm Output
Humidity Control Output, Humidity Alarm Output
PID or ON/OFF selectable temperature control
Set Value Boundaries
Alarm parameters and alarm status can be adjusted according to the audible alert (internal buzzer functions for alarm conditions)
Password protection for programming section

Technical Specification

ESM-3723 Measurement range
0°C...100°C (PTC, NTC, Pt-100),
0°C...100°C (PT100),
-20°C...80°C(ProNem Mini PMI-P)

Accuracy: Scale ±%1, Sensor Break Protection: Upscale
Sampling Cycle: 3 samples per second Conrol Form: ON/OFF, PID
Pronem Mini Measurement range
Measurement range (RH): 0...100 %RH
Measurement range (T): -20°C...+80°C
Accuracy (RH): +/- 2 %RH (Typ)@23°C
Accuracy (T): +/- 0,3°C (Typ)@23°C

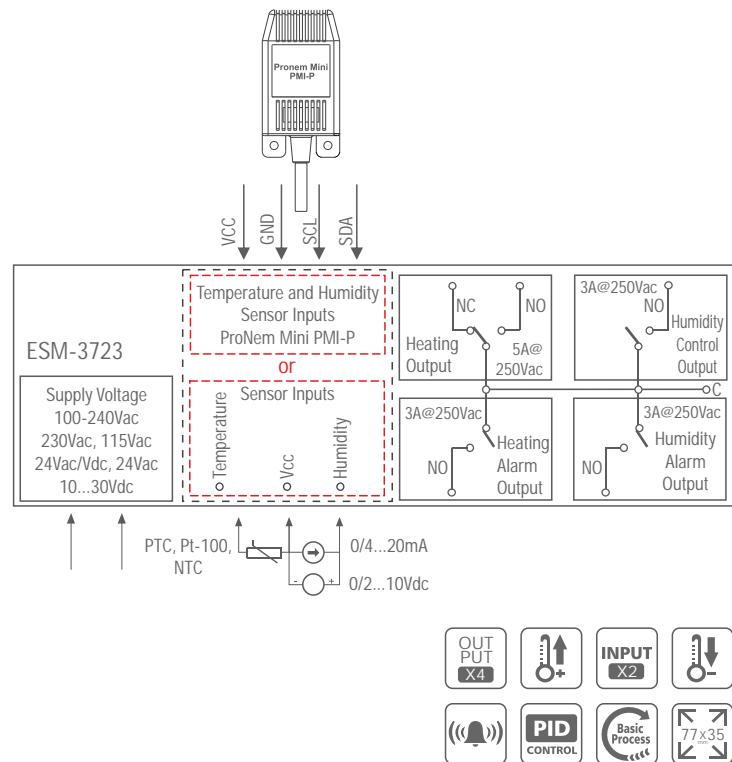

ESM-3723	.	A	.	B	.	C	.	0	.	E	/	01	.	01	/	1	.	V	.	0	.	0	V
ESM-3723 (76x34,5x71 mm)	.																						
A Supply Voltage																							
1 100-240Vac 50/60Hz																							
2 24Vac/dc 50/60 Hz (-15%; +10%)																							
3 24Vac 50/60 Hz (-15%; +10%)																							
4 115Vac 50/60 Hz (-15%;+10%)																							
5 230Vac 50/60 Hz (-15%;+10%)																							
8 10...30Vdc 1.5W																							
B Temperature Sensor Input																							
1 PT 100, IEC751(ITS90)																							
2 PTC																							
3 NTC																							
4 0/2..10Vdc Voltage Input																							
5 0/4..20mA Current Input																							
6 ProNem Mini PMI-P																							
C Humidity Sensor Input																							
4 0/2..10Vdc Voltage Input																							
5 0/4..20mA Current Input																							
6 ProNem Mini PMI-P																							
E Process Output																							
1 Heating Control: Relay (5A @ 250Vac)																							
2 SSR Driver output (Maximum 30mA @ 15Vdc)																							
U Humidity Alarm Output																							
Relay (3A@250Vac)	1																						
H Heating Alarm Output																							
Relay (3A@250Vac)	01																						
F Humidity Output																							
(3A@250Vac)	01																						

Digital Ammeter

EDA-3700



- ▶ AC, DC or True RMS measuring feature



- ▶ Remote access, data collecting and controlling with Modbus RTU

Specifications

Easily changeable from front panel
5A or 60 mV AC, DC, AC/DC input
Programmable scale from 5A to 9999A
Alarm parameters
Password protection for programming mode
Having CE mark according to European Norms

Technical Specification

Physical properties: 76 mm x 34.5 mm x 71 mm Plastic for panel mounting protection. Panel section 71 x 29 mm.
Protection Class : NEMA 4X (Ip65 at front, Ip20 at rear)
Accuracy: Scale $\pm 1\%$,
Reading frequency : According to parameter value, Control Form: ON/OFF
Storage / Operating Temperature : -30 °C to +80 °C / -20 °C to +70°C
Storage / Operating Humidity : 90 % max. (None condensing)
Environmental Ratings : Standard, indoor at an altitude of less than 2000 meters with none condensing humidity.
Scale : AC ve RMS 0 - 9999 / DC (-1999) - 9999
Display : 14 mm Red 4 digits LED Display

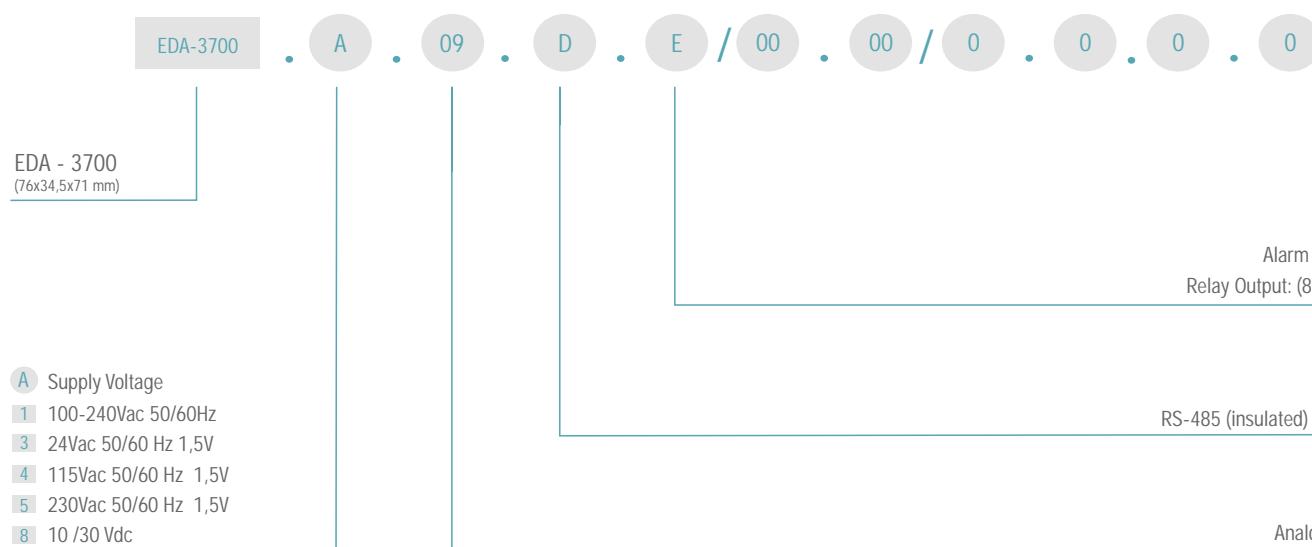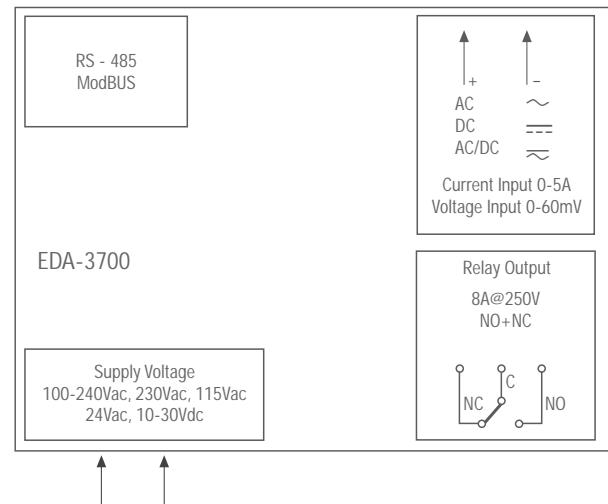



Temperature Controllers

Single SET Digital On/Off

ESM-3710-N



CE EAC

- ▶ Installing parameters using Prokey
- ▶ Password protection for programming section



- ▶ Remote acces, data collecting and controlling with Modbus RTU
- ▶ Adjustable internal buzzer according to sensor defect status

Specifications

4 Digits Display
 NTC Input or PTC Input or
 J type thermocouple Input or Ktype thermocouple Input or
 2-Wire PT-100 Input or 2-Wire PT-1000 Input (Must be determined in order.)
 Adjustable temperature offset
 ON/OFF temperature control
 Selectable heating or cooling function
 Selectable decimal type for PTC and NTC via parameter
 Adjustable temperature offset
 Set value low limit and set value high limit boundaries
 Operation selection of compressor operates continuously,
 stops or operates periodically in case of sensor defect
 Compressor protection delays

Technical Specification

Accuracy: $\pm 1\%$ of scale
 Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$
 Sensor Break Protection: Upscale
 Sampling Cycle: 3 samples per second

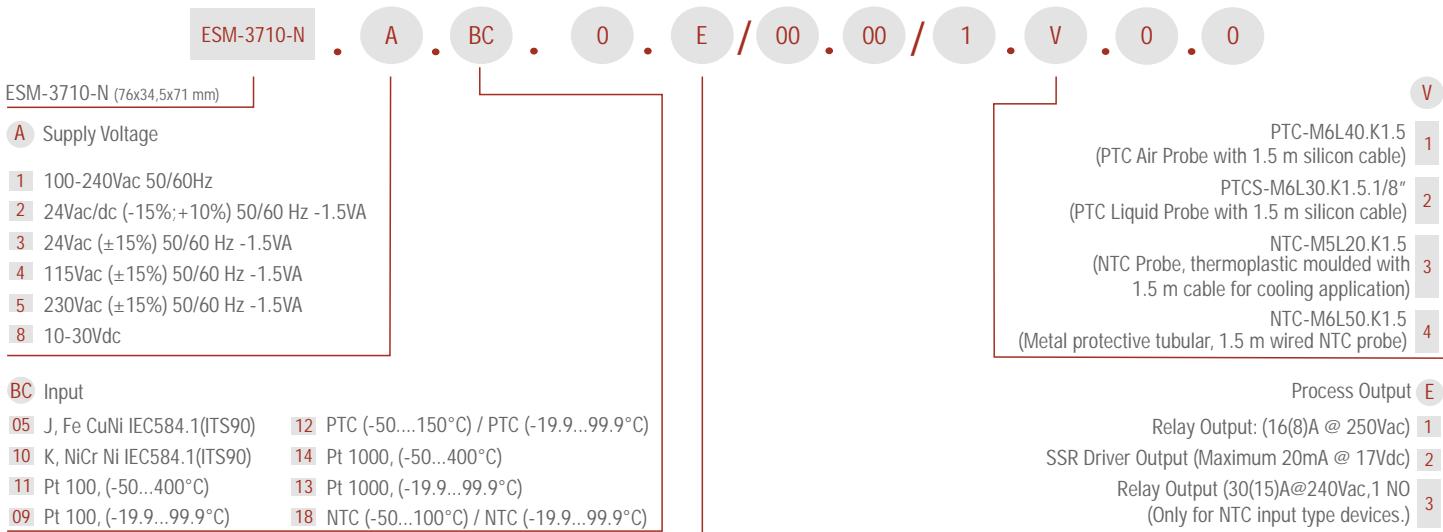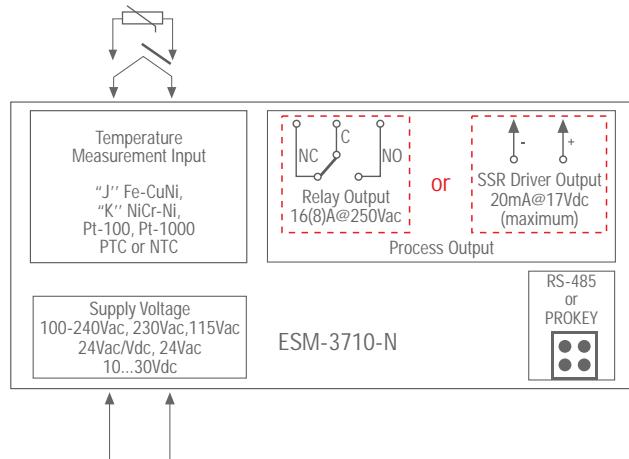

Temperature Controller

DIN RAIL Mounting Digital On/Off

ESM-1510-N



► DIN RAIL Mounting

Specifications

3 Digits display

PTC, NTC PT-100, PT-1000 thermoresistances input types

Fe-Const (J), NiCr-Ni (K) thermocouples input types (Must be determined in order)

ON/OFF Temperature Control

Selectable Heating or Cooling Function

Selectable decimal type for PTC and NTC via parameter

Adjustable Temperature Offset Value

Set Value Boundaries

Relay or SSR Driver Output

Operation selection of compressor operates continuously,

stops or operates periodically in case of probe defect

Compressor Protection Times

Password Protection for Programming Section

Technical Specification


Accuracy: $\pm 1\%$ of scale

Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$

Sensor Break Protection: Upscale

Sampling Cycle: 3 samples per second

► Heating / Cooling Applications

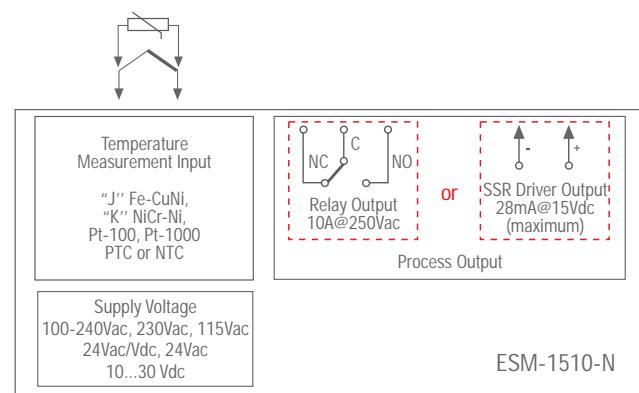

ESM-1510-N . A . BC . 0 . E / 00 . 00 / 2 . V . 0 . 0

ESM-1510-N (90x35x61,2 mm)

A Supply Voltage

- 1 100-240Vac 50/60Hz
- 2 24Vac/dc (-15%;+10%) 50/60 Hz -1.5VA
- 3 24Vac ($\pm 15\%$) 50/60 Hz -1.5VA
- 4 115Vac ($\pm 15\%$) 50/60 Hz -1.5VA
- 5 230Vac ($\pm 15\%$) 50/60 Hz -1.5VA
- 8 10...30 Vdc

BC Input

- 05 J, Fe CuNi IEC584.1(ITS90)
- 10 K, NiCr Ni IEC584.1(ITS90)
- 11 Pt 100, (-50...400°C)
- 09 Pt 100, (-19.9...99.9°C)
- 12 PTC (-50...150°C) / PTC (-19.9...99.9°C)
- 15 PTC (-19.9...99.9°C)
- 14 Pt 1000, (-50...400°C)
- 13 Pt 1000, (-19.9...99.9°C)
- 18 NTC (-50...100°C) / NTC (-19.9...99.9°C)
- 19 NTC (-19.9...99.9°C)

V PTC-M6L40.K1.5
(PTC Air Probe with 1.5 m silicon cable) 1

PTCS-M6L30.K1.5.1/8"
(PTC Liquid Probe with 1.5 m silicon cable) 2

NTC-M5L20.K1.5
(NTC Probe, thermoplastic moulded with
1.5 m cable for cooling application) 3

NTC-M6L50.K1.5
(Metal protective tubular, 1.5 m wired NTC probe) 4

Process Output E

Relay Output (10A @ 250Vac) 1
SSR Driver Output (Maximum 28mA @ 15Vdc) 2



Heating Controller

Single SET ON/OFF

ESM-3711-HN



CE EAC

- ▶ Remote access, data collecting and controlling with Modbus RTU
- ▶ Installing parameters using Prokey
- ▶ User can select to start cooking time (Timer) when temperature reaches to the set value

Specifications

4 Digits display

User can select to start Cooking Time when Temperature reaches to the Set Value

PTC, NTC, PT-100, PT-1000 thermoresistances input types

Fe-Const (J), NiCr-Ni (K) thermocouples input types

Temperature Control Output and Alarm Output

Selectable decimal type for PTC and NTC via parameter

Relay or SSR Driver Output

Adjustable Cooking Time from Front Panel

Digital Input (Start/Stop Input for Cooking Time)

Temperature Control According to the Cooking Time

Adjustable Internal Buzzer According to Cooking Time,

Probe Defect and Alarm Status

Technical Specification


Accuracy: $\pm 1\%$ of scale

Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$

Sensor Break Protection: Upscale

Sampling Cycle: 3 samples per second

- ▶ Adjustable temperature offset
- ▶ Functional Internal Buzzer
- ▶ ON / OFF temperature control

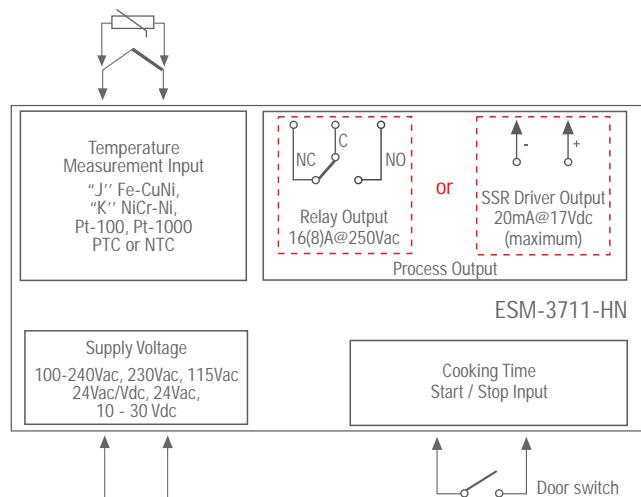

ESM-3711-HN . A . BC . 0 . E / 00 . 00 / 1 . V . 0 . 0

ESM-3711-HN
(76x34,5x71 mm)

A Supply Voltage
1 100-240Vac 50/60Hz
2 24Vac/dc ($\pm 15\%$) 50/60 Hz
3 24Vac ($\pm 15\%$) 50/60 Hz
4 115Vac ($\pm 15\%$) 50/60 Hz
5 230Vac ($\pm 15\%$) 50/60 Hz
8 10...30Vdc

BC Input
05 J, Fe CuNi IEC584.1(ITS90)
10 K, NiCr Ni IEC584.1(ITS90)
11 Pt 100, (-50...400°C)
09 Pt 100, (-19.9...99.9°C)
12 PTC (-50...150°C) / PTC (-19.9...99.9°C)
14 Pt 1000, (-50...400°C)
13 Pt 1000, (-19.9...99.9°C)
18 NTC (-50...100°C) / NTC (-19.9...99.9°C)

V
PTC-M6L40.K1.5
(PTC Air Probe with 1.5 m silicon cable) 1
PTCS-M6L30.K1.5.1/8"
(PTC Liquid Probe with 1.5 m silicon cable) 2
NTC-M5L20.K1.5
(NTC Probe, thermoplastic moulded with
1.5 m cable for cooling application) 3
NTC-M6L50.K1.5
(Metal protective tubular, 1.5 m wired NTC probe) 4

Process Output E
Relay Output: (16(8)A @ 250Vac) 1
SSR Driver Output: (Max.20mA, Max.17Vdc) 2

Cooling Controller Devices

Single SET

ESM-3711-CN



CE EAC

- ▶ Selectable defrost function (hot gas or electric)
- ▶ Remote access, data collecting and controlling with ModBus RTU
- ▶ Operation selection of compressor operate continuously, stops or operates periodically in case of cabinet probe defect

Specifications

Cooling Application

NTC Input or PTC Input (Must be determined in order.)

Selectable decimal type for PTC and NTC via parameter

ON/OFF Control

Adjustable °C and °F

Set value boundaries


Selectable defrost function (hot gas or electric)

Adjustable defrost time from front panel

Defrost time and/or manual defrost and/or temperature set value protection

Installing parameters using Prokey

Password protection for programming mode

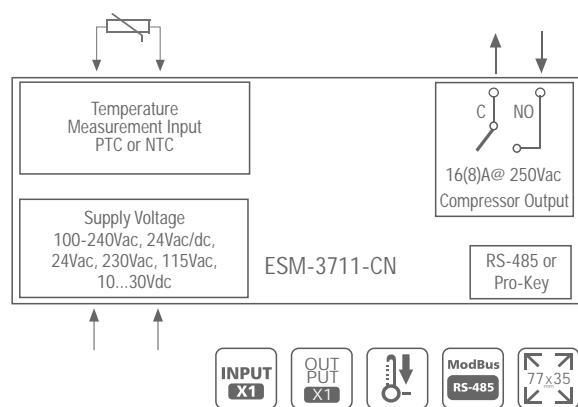


Technical Specification

Accuracy: ±1% of scale

Sensor Break Protection: Upscale

Sampling Cycle: 3 samples per second

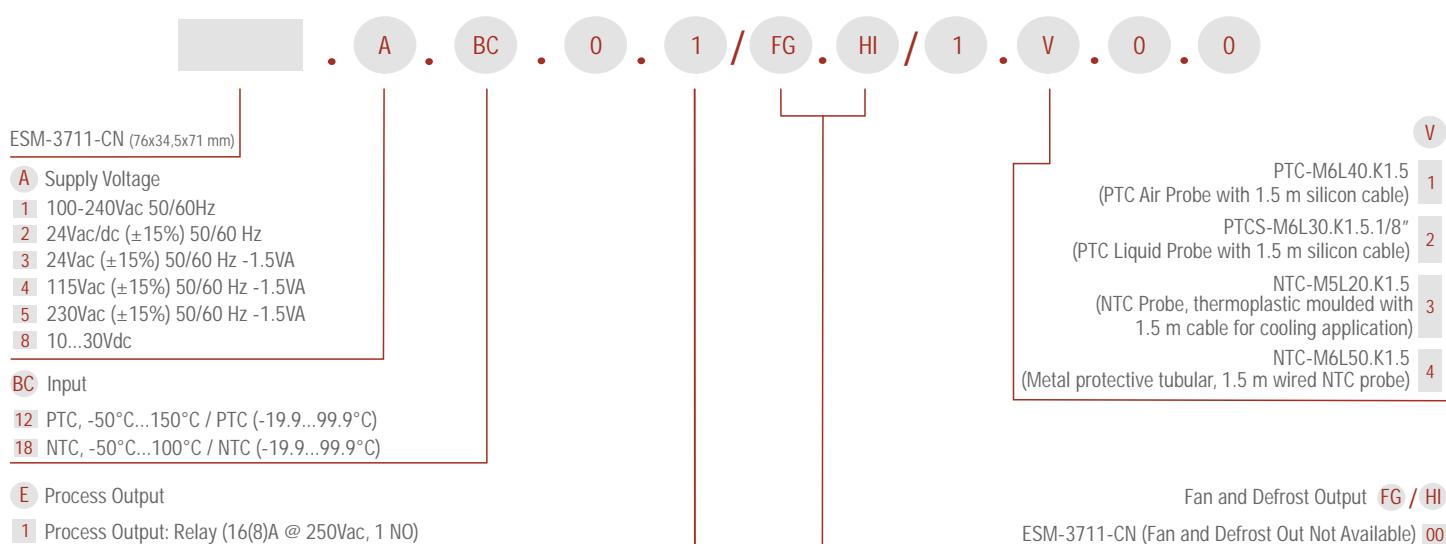



Cooling Controller Devices

Duel SET

ESM-3712-CN



CE EAC

- ▶ Installing parameters using Prokey
 - ▶ Remote access, data collecting and controlling with ModBus RTU
 - ▶ Separately adjustable 2 offset value for cabinet and evaporator sensor

Specifications

NTC Input or PTC Input (Must be determined in order.)

Selectable decimal type for PTC and NTC via parameter

ON/OFF Control

Adjustable °C and °F

Set value boundaries

Set value boundaries

Configurable digital input

Selectable defrost function (heat, gas or electric)

All-weather defrost function


Adjustable defrost time from front panel

Defrost time and/or manual defrost and/or temperature set value protection

3 Output for compressor, defrost and fan controls

Password protection for programming mode

- ▶ Operation selection of compressor operate continuously, stops or operates periodically in case of cabinet probe defect
 - ▶ Fan can be operated depending on compressor and defrost

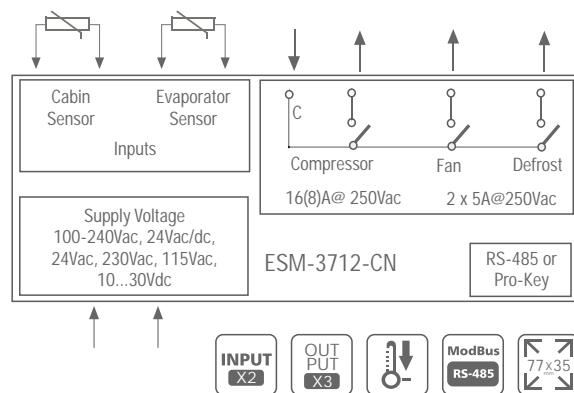


Technical Specification

Accuracy: $\pm 1\%$ of scale

Sensor Break Protection: Upscale

Sampling Cycle: 3 samples per second

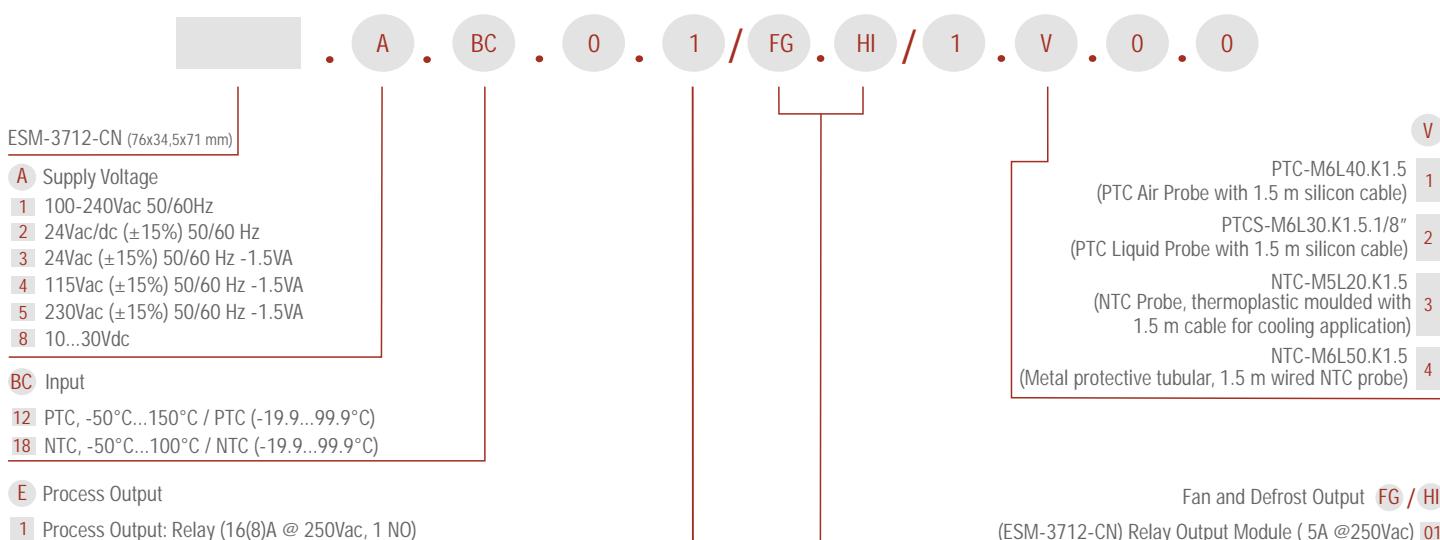

Temperature Controller

Dual SET On/Off Heating and Cooling Controller

ESM-3712-HCN



- ▶ Installing parameters using Prokey
 - ▶ Remote access, data collecting and controlling with Modbus RTU
 - ▶ 2 Output for compressor and alarm controls
 - ▶ Process Set value and Alarm Set value low limit and set value high limit boundaries

Specifications

4 Digits Display

NTC Input or PTC Input (Must be determined in order)

Selectable decimal type for PTC and NTC via parameter

ON/OFF temperature control

Selectable heating or cooling function

Selection of operation with hysteresis

Adjustable temper

Alarm parameters

Operation selection of compressor operates continuously.

Operation selection or compression stops or operates periodically.

Compressor protection delays

Password protection for programming section

Adjustable Alarm Set Value from front panel



Adjustable internal buzzer a

Technical Specifications

Accuracy: $\pm 1\%$ of scale

Cold Junction Compensation: Aut.

Sensor Break Protection: Upscale

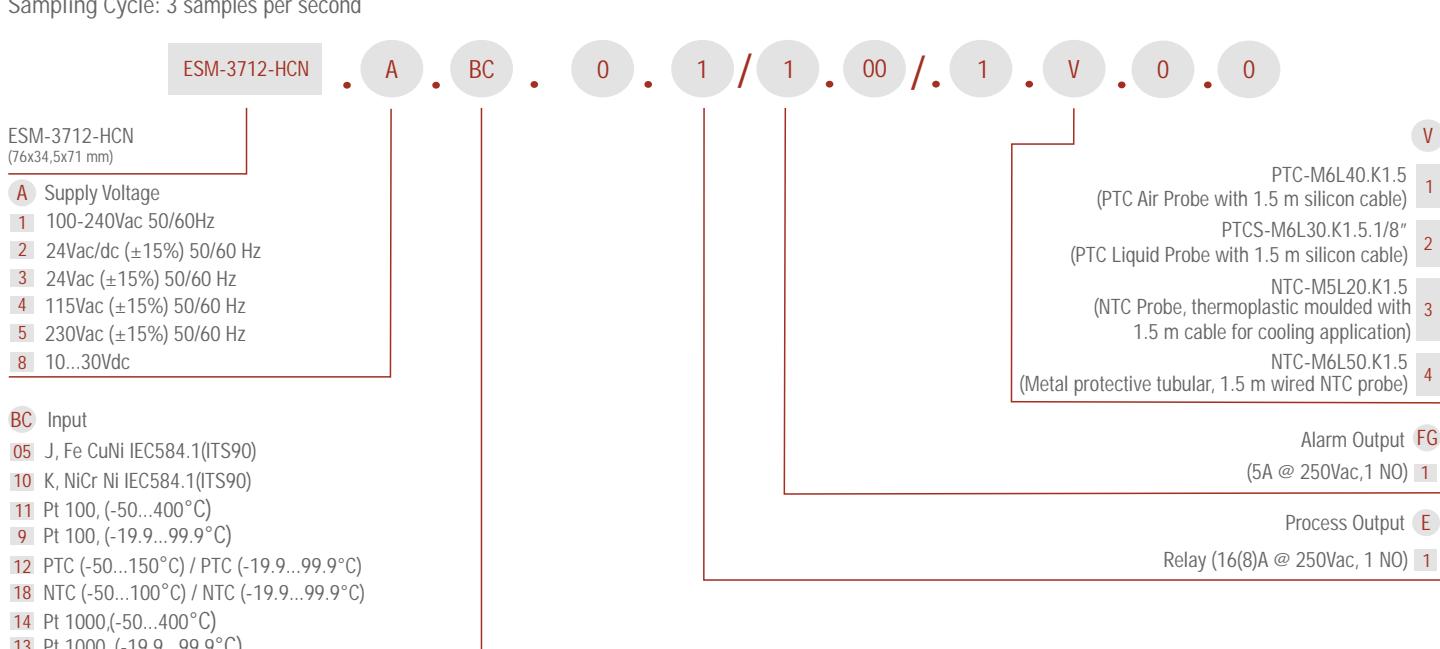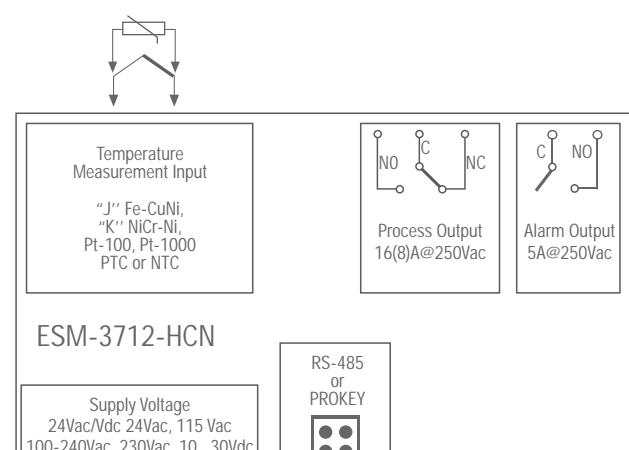



Temperature Controllers


Single & Dual ON/OFF

ESM-4410 ESM-7710 ESM-9910



▶ ON/OFF Control Form

▶ Selectable Heating and Cooling Function





Specifications

- PTC, NTC, PT-100, PT-1000 thermoresistances input types
- Fe-Const (J), NiCr-Ni (K) thermocouples input types (Must be determined in order)
- Operating Type Selection with Hysteresis
- Adjustment of Temperature Offset Value
- Minimum Pulling Time Adjustment for Control Outputs
- Password Protection for Programming Section

Technical Specification

- Accuracy: $\pm 1\%$ of scale
- Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$
- Sensor Break Protection: Upscale
- Sampling Cycle: 3 samples per second

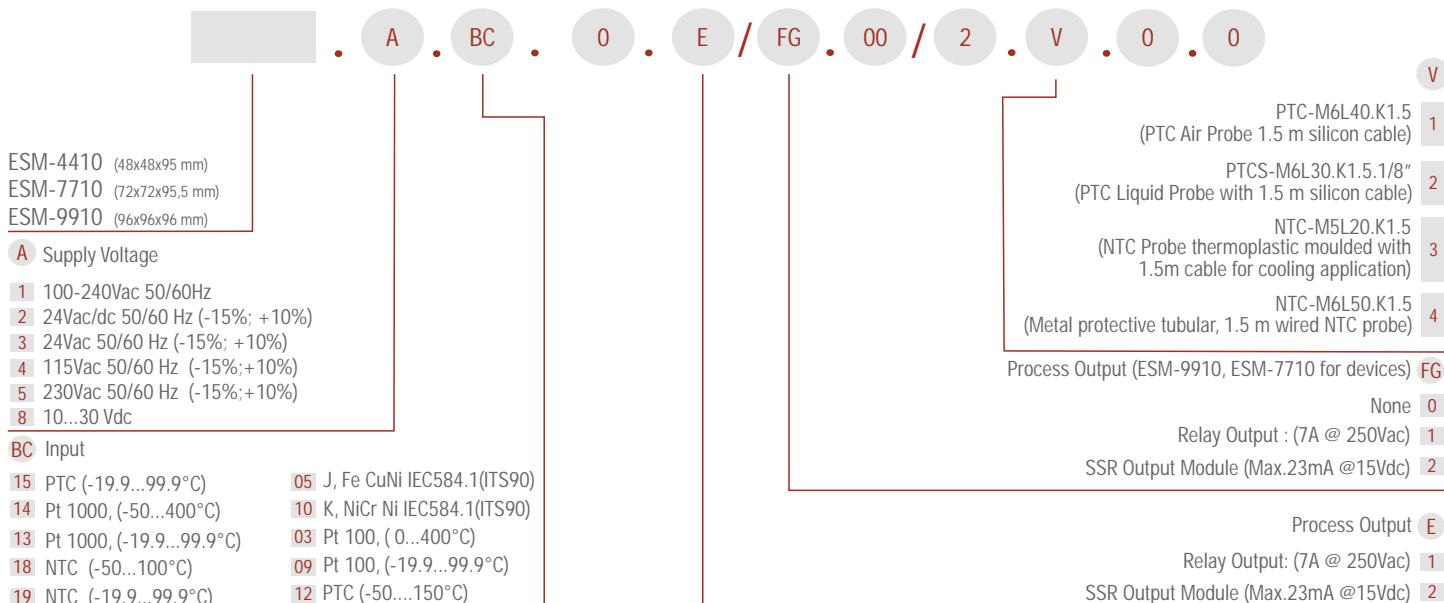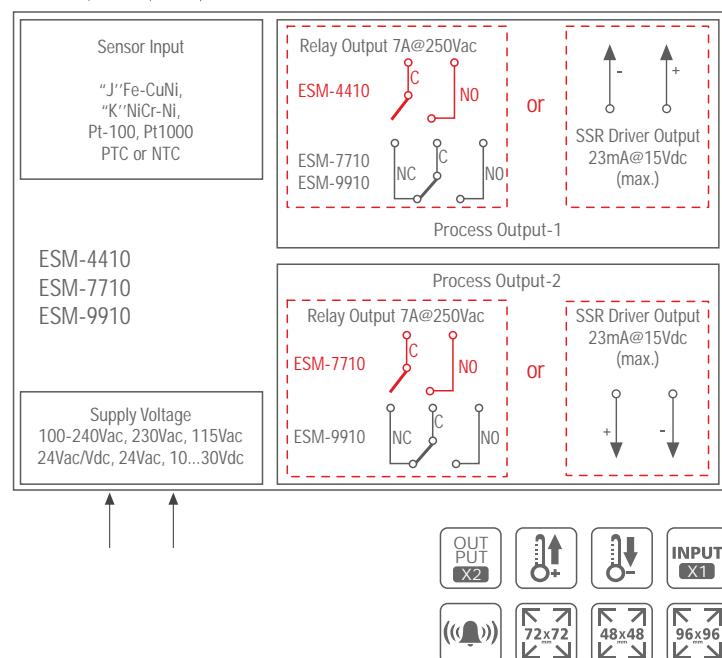

Temperature Controller

Dual SET PID

ESM-3720



CE EAC

- ▶ Remote acces, data collecting and controlling with Modbus RTU
- ▶ Installing parameters using Prokey
- ▶ PID or ON/OFF selectable temperature control

- ▶ Password protection for programming section
- ▶ Having CE mark according to European Norms
- ▶ Adjustable internal buzzer according to sensor defect status

Specifications

4 Digits Display

NTC Input or PTC Input or

J type thermocouple Input or Ktype thermocouple Input or
2-Wire PT-100 Input or 2-Wire PT-1000 Input (Must be determined in order.)

Adjustable temperature offset

Selectable decimal type for PTC and NTC via parameter

Adjustable temperature offset

Set value low limit and set value high limit boundaries

Operation selection of compressor operates continuously,
stops or operates periodically in case of sensor defect

Compressor protection delays



Technical Specification

Accuracy: $\pm 1\%$ of scale

Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$

Sensor Break Protection: Upscale

Sampling Cycle: 3 samples per second

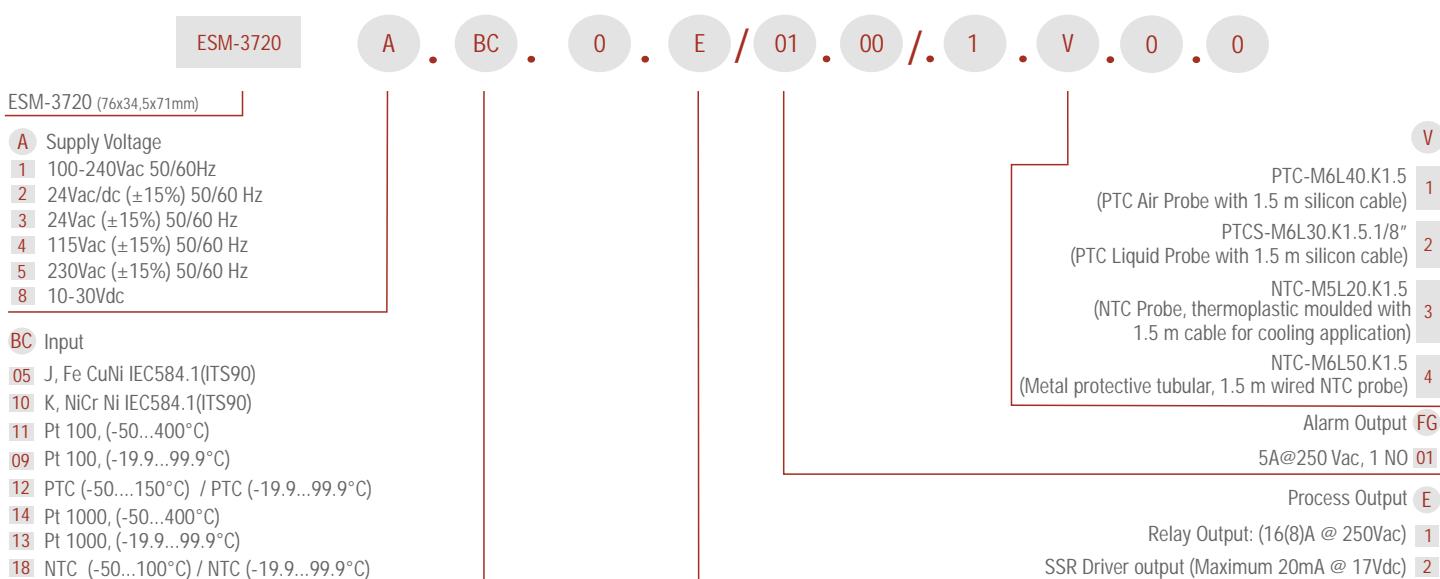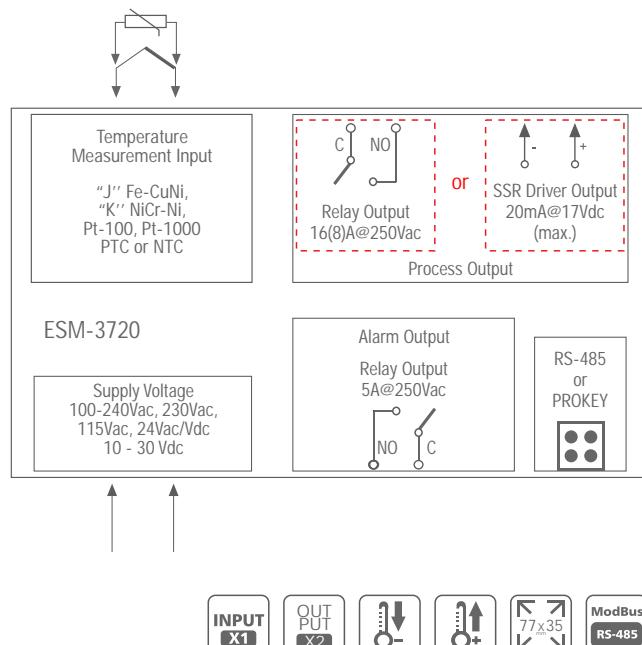



Temperature Controllers

DIN RAIL Mounting Type, Digital PID Controller

ESM-1520



► DIN RAIL Mounting

Specifications

3 Digits display

PTC, NTC PT-100, PT-1000 thermoresistances input types

Fe-Const (J), NiCr-Ni (K) thermocouples input types (Must be determined in order)

PID or ON/OFF Temperature Control

Selectable Heating or Cooling Function

Selectable decimal type for PTC and NTC via parameter

Adjustable Temperature Offset Value

Set Value Boundaries

Relay or SSR Driver Output

Operation selection of compressor operates continuously,

stops or operates periodically in case of probe defect

Compressor Protection Times

Password Protection for Programming Section



Technical Specification

Accuracy: $\pm 1\%$ of scale

Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$

Sensor Break Protection: Upscale

Sampling Cycle: 3 samples per second

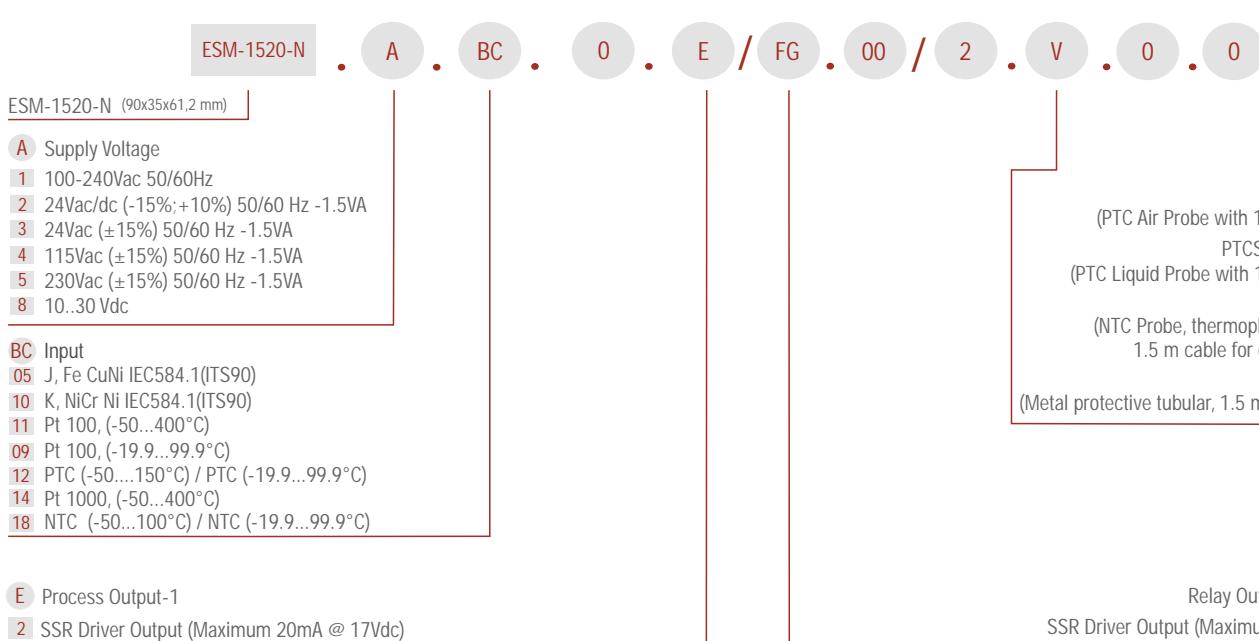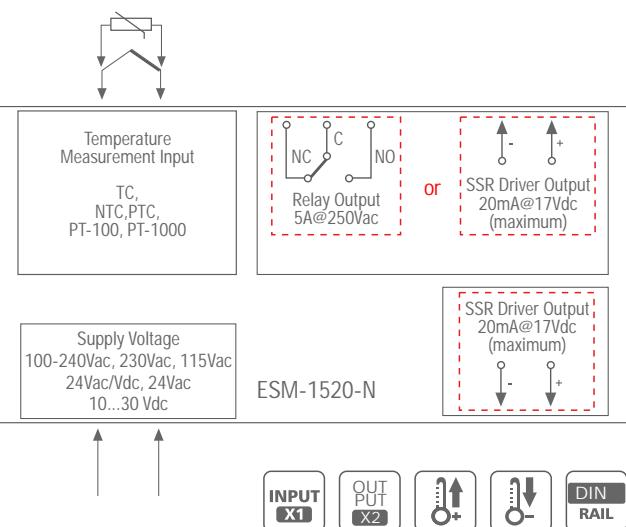

PID Temperature Controllers

ESM-4420 ESM-4920
ESM-7720 ESM-9420 ESM-9920





- ▶ Universal process input (TC,RTD)
- ▶ Adaptation of PID Coefficients to the system with Self-Tune and AUTO-Tune operations
- ▶ 2 Relays and 1 SSR drive output
- ▶ Soft Start Output For Resistance Durability

Specifications

4 Digits process (PV) and 4 Digits set value (SV) display
Configurable ON/OFF, P, PI, PD, and PID control forms
Programmable Heating or Cooling Functions for Control Output
Alarm Functions for Alarm Output
SET Value Limitation For System Protection
Sensor Break Protection

Technical Specification

Accuracy: $\pm 0.25\%$ of full scale for thermocouple, thermoresistance
Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$
Line Compensation: Maximum 10 Ohm
Sensor Break Protection: Upscale
Sampling Cycle: 3 samples per second
Input Filter: 1.0 second

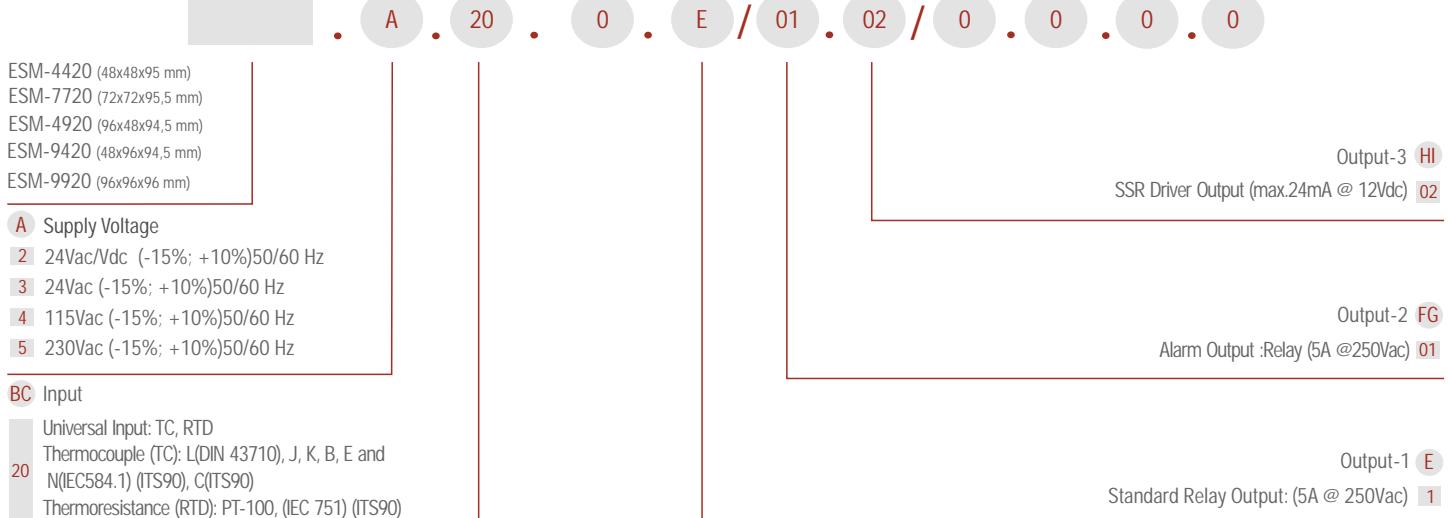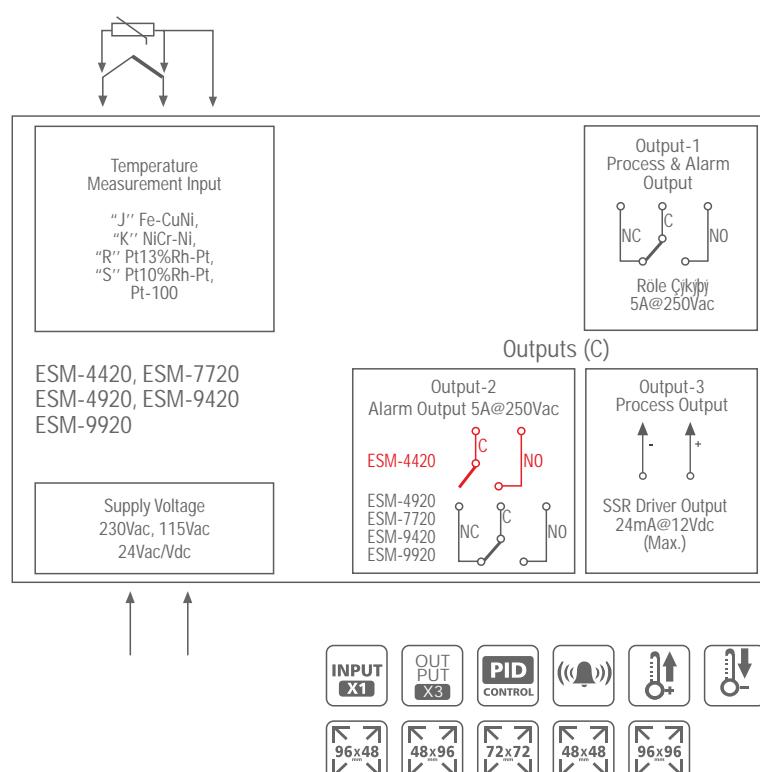



PID Temperature Controllers

ESD-9950-N




- ▶ Adjustable temperature offset
- ▶ Programmable control and alarm functions for control outputs

- ▶ Programmable ON-OFF, P, PI, PD, PID control forms
- ▶ With Auto Tune / Self Tune operation, the PID coefficients adaptation to the system


Specifications

4 Digits display
 J type Thermocouple Input or
 K type Thermocouple Input or
 R type Thermocouple Input or
 S type Thermocouple Input or
 2 or 3 wire PT 100 Input

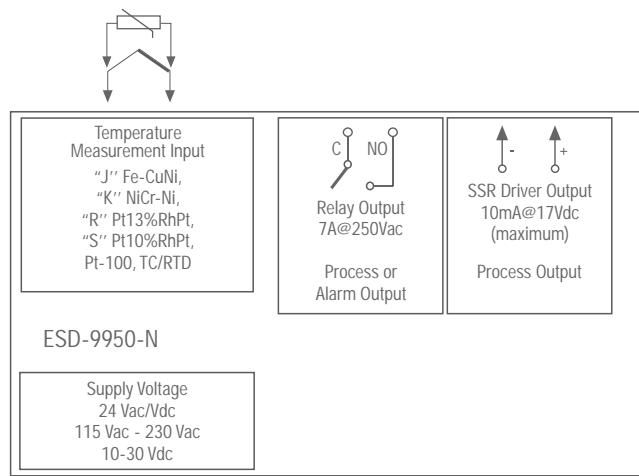

Technical Specification

Accuracy: $\pm 2\%$ of scale
 Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$
 Sensor Break Protection: Upscale
 Sampling Cycle: 10 samples per second

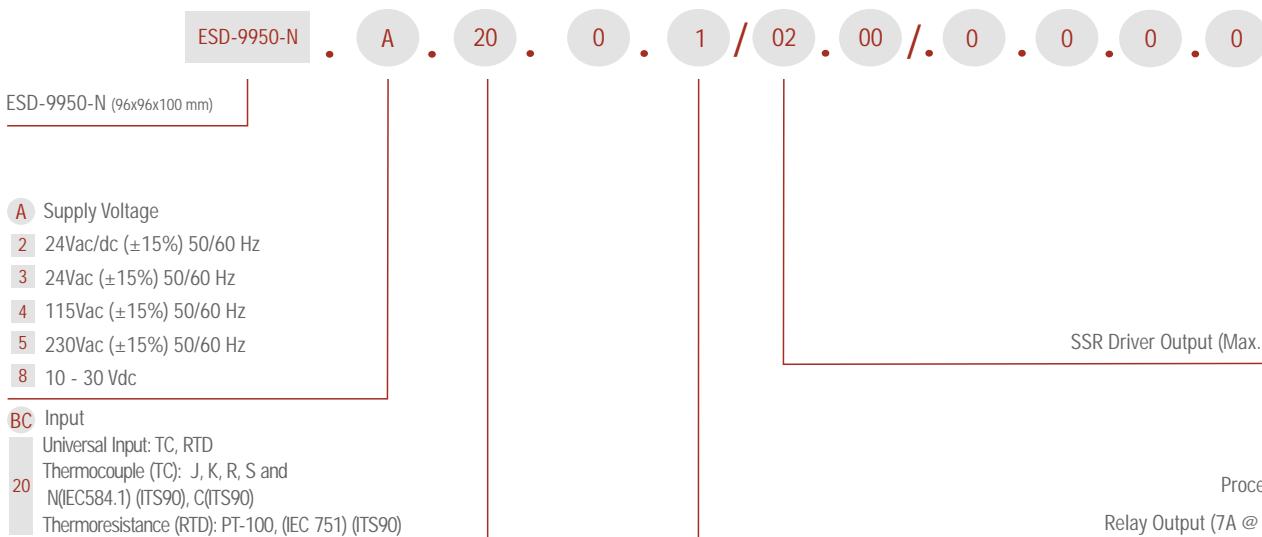

Order Code																
A	BC	D	E	/	FG	HI	/	U	V	W	Z					
0				/			/	1		0	0					
	ESM-3710-N	ESM-1510-N	ESM-3711-HN	ESM-3711-CN	ESM-3712-CN	ESM-3712-HCN	ESM-4410	ESM-7710	ESM-9910	ESM-3720	ESM-4420	ESM-9420	ESM-7720	ESM-9420	ESM-9920	ESD-9950-N
A Supply Voltage																
1 100-240Vac 50/60Hz	+	+	+	+	+	+	+	+	+	-	-	-	-	-	-	
2 24Vac/Vdc (-15%, +10%) 50/60Hz	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
3 24Vac (-15%, -15%) 50/60Hz	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
4 115Vac (-15%, -15%) 50/60Hz	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
5 230Vac (-15%, -15%) 50/60Hz	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
8 10 - 30 Vdc	+	+	+	+	+	+	+	+	+	-	-	-	-	-	+	
BC Input Type																
20 Universal (TC or RTD)	-	-	-	-	-	-	-	-	+	+	+	+	+	+	+	
05 J, Fe-CuNi, 0...800 °C	+	+	+	-	-	+	+	+	-	-	-	-	-	-	-	
10 K, NiCr-Ni, 0...999 °C	+	+	+	-	-	+	+	+	-	-	-	-	-	-	-	
03 Pt-100, 0...400 °C	-	-	-	-	-	-	+	+	-	-	-	-	-	-	-	
11 Pt-100, -50...400 °C	+	+	+	-	-	+	-	-	-	-	-	-	-	-	-	
09 Pt-100, -19.9...99.9 °C	+	+	+	-	-	+	+	+	-	-	-	-	-	-	-	
12 PTC, -50...150 °C	+	+	+	+	+	+	+	+	-	-	-	-	-	-	-	
15 PTC, -19.9...99.9 °C	-	+	-	-	-	-	+	+	-	-	-	-	-	-	-	
14 Pt-1000, -50...400 °C	+	+	+	-	-	+	+	+	-	-	-	-	-	-	-	
13 Pt-1000, -19.9...99.9 °C	+	+	+	-	-	+	+	+	-	-	-	-	-	-	-	
18 NTC, -50...100 °C	+	+	+	+	+	+	+	+	-	-	-	-	-	-	-	
19 NTC, -19.9...99.9 °C	-	+	-	-	-	-	+	+	-	-	-	-	-	-	-	
E Output 1																
1 Relay Output	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
2 SSR Driver Output (max. 20mA@12Vdc)	+	+	+	-	-	-	+	+	+	-	-	-	-	-	-	
3 Relay Output (30(15)A@240Vac)	+	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
FG Output 2																
01 Relay Output	-	-	-	-	+	+	-	+	+	+	+	+	+	+	-	
02 SSR Driver Output (max. 20mA@12Vdc)	-	-	-	-	-	-	-	-	+	+	-	-	-	-	+	
HII Output 3																
02 SSR Driver Output (max. 20mA@12Vdc)	-	-	-	-	-	-	-	-	-	-	+	+	+	+	-	
V PTC and NTC Temperature Sensor Selections																
0 Without Sensor	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
1 PTC-M6L40.K1,5 PTC Air probe, 1,5 m silicon cable	+	+	+	+	+	+	+	+	+	+	-	-	-	-	-	
2 PTCS-M6L30.K1,5 1/8'' PTC Liquid probe with, 1,5 m silicon cable, 1/8" fittingnut	+	+	+	+	+	+	+	+	+	+	-	-	-	-	-	
3 NTC-M5L20.K1,5 Thermoplastic covering for cooling application 1,5 m cable NTC probe	+	+	+	+	+	+	+	+	+	+	-	-	-	-	-	
Specifications																
Dimension (mm)	77x35	DIN Rail	77x35	77x35	77x35	77x35	48x48	72x72	96x96	77x35	48x48	96x48	72x72	48x96	96x96	96x96
Password protection for programming mode	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
Set value boundaries	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
Adjustable temperature offset	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
ON/OFF Temperature control	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
Adjustable P, PD, PI ve PID Control forms	-	-	-	-	-	-	-	-	-	+	+	+	+	+	+	
Adjustable Compressor delay times	+	+	-	-	+	+	-	-	-	-	-	-	-	-	-	
Alarm functions for alarm output	-	-	-	-	-	+	-	-	-	+	+	+	+	+	-	
Adaptation of PID coefficients to the system with Self-Tune operation	-	-	-	-	-	-	-	-	-	+	+	+	+	+	+	
Universal Thermocouple and thermoresistances process input	-	-	-	-	-	-	-	-	-	+	+	+	+	+	+	
Programmable Heating or Cooling functions for control outputs	+	+	-	-	-	+	+	+	+	+	+	+	+	+	+	
Adjustable hysteresis value	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
Adjustable re-activation time for control outputs	+	+	-	-	-	+	+	+	+	-	-	-	-	-	-	
Functional Internal Buzzer	+	+	+	+	+	+	-	-	-	+	-	-	-	-	-	
Installing Parameters via Prokey	+	+	+	+	+	+	-	-	-	+	-	-	-	-	-	
Data collecting & controlling with Modbus RTU	+	+	+	+	+	+	-	-	-	+	-	-	-	-	-	

Order Code		Eco LITE	Eco PID	Eco PID+	Eco HR
A	B	C	D	E	
A Dimension					
4	48x48mm	+	+	+	+
B Supply Voltage					
1	100-240Vac 50/60Hz	+	+	+	+
2	24Vac/dc ($\pm 15\%$) 50/60Hz	+	+	+	+
3	115Vac ($\pm 15\%$) 50/60Hz	+	+	+	+
5	230Vac ($\pm 15\%$) 50/60Hz	+	+	+	+
6	10-30Vdc	+	+	+	+
7	24Vac ($\pm 15\%$) 50/60Hz	+	+	+	+
C Output-1					
1R	1xRelay Output (NO+C) 5A@250Vac	+	+	+	+
2R	2xRelay Output (NO+NO+C) 5A@250Vac	+	+	+	+
3R	3xRelay Output (NO+NO+C, NO+C) 5A@250Vac	-	-	+	-
2W	3xRelay Output (NO/NC+C, NO+C) 5A@250Vac	-	-	+	-
D Output-2					
S	SSR driver output (Maks. 10mA, 12Vdc)	-	+	+	+
E Communication					
0	Without Communication	+			
485	RS-485 ModBus	-	+	*	+
DI	Digital Input (220Vac) for secondary set value	-	-	-	+
Specifiatio					
Universal Thermocouples (TC) & Thermoresistances (RTD) input		+	+	+	+
ON-OFF control form		+	+	+	+
P, PI, PID, control form		-	+	+	+
Adaptation of PID coefficients to the system with					
Self-Tune and Auto-Tune operation		-	+	+	+
Selectable heating and cooling function		+	+	+	+
Adjustable temperature offset value		+	+	+	+
Adjustable hysteresis value		+	+	+	+
Minimum pulling time adjustment for control outputs		+	+	+	+
Saving and Recovery of user parameters		+	+	+	+
Return to Factory settings		+	+	+	+
RS-485ModBus (RTU) communication option		-	+	+	+
Digital or RS-485 input for activate the 2nd Set value		-	-	-	+
4 Digits Process, 4 Digits Set notation		-	-	+	-

* **Eco PID+** No communication in 2W and 3R output types

Temperature Controllers

ECO LITE



CE

- ▶ TC (J,K,R,S,T Input Types) and RTD inputs selectable by parameter
- ▶ Low Power Consumption, Energy saving and Environmentally Friendly with 2VA



- ▶ Saving and Recovery of user parameters
- ▶ Return to Factory Settings

Specifications

3 Digits Process (PV) and 4 Digits Set (SV) display
Process input (TC, RTD)
ON-OFF control form
Selectable heating and cooling function
Selectable temperature offset value
Operation type selection with hysteresis
Minimum pulling time adjustment
for control outputs
Password protection for programming mode

Technical Specification

Accuracy: $\pm 0.25\%$ of full scale
Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$
Line Compensation: Maximum 10 Ohm
Sensor Break Protection: Upscale
Sampling Cycle: 0.1 second

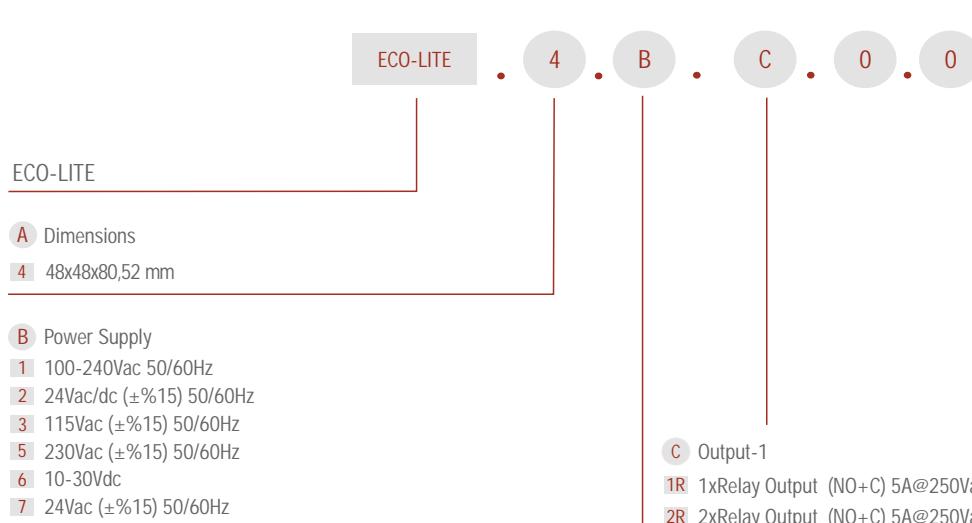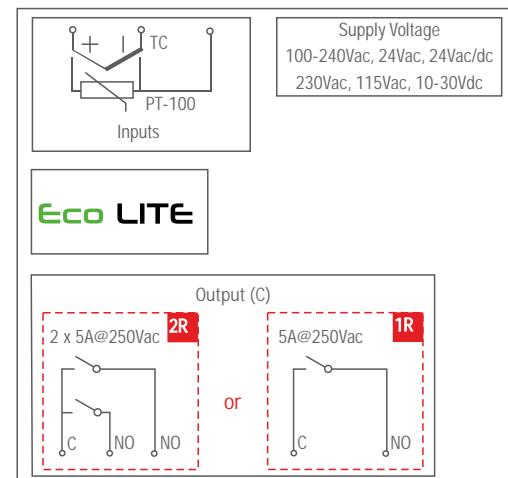



PID Temperature Controllers


ECO PID



- ▶ High Resolution Sensitive PID control
- ▶ TC (J,K,R,S,T Input Types) and RTD inputs selectable by parameter
- ▶ RS-485 Modbus (RTU) communication option
- ▶ Saving and Recovery of user parameters
- ▶ Return to Factory Settings


Specifications

3 Digits Process (PV) and 4 Digits Set (SV) display
 Process input (TC, RTD)
 Programmable ON-OFF, P, PI, PD, PID control forms
 Adaptation of PID Coefficients to the system
 with Self-Tune operation (Step Response Tuning) and
 Auto-Tune (limit cycling tuning)
 Selectable heating and cooling function
 Selectable temperature offset value
 Operation type selection with hysteresis
 Minimum pulling time adjustment for control outputs
 Password protection for programming mode

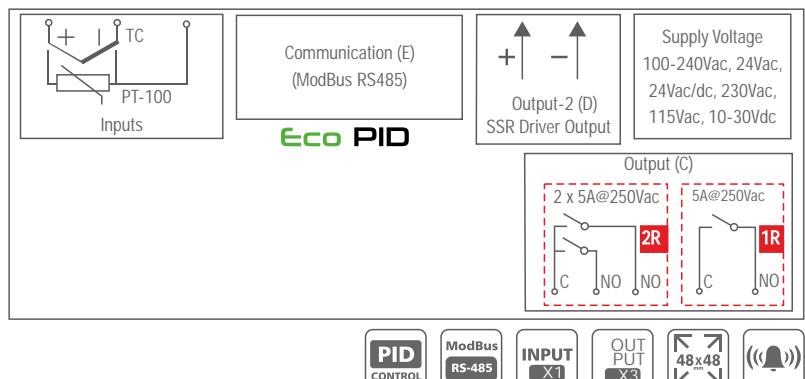

Technical Specification

Accuracy: $\pm 0.25\%$ of full scale
 Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$
 Line Compensation: Maximum 10 Ohm
 Sensor Break Protection: Upscale
 Sampling Cycle: 0.1 second

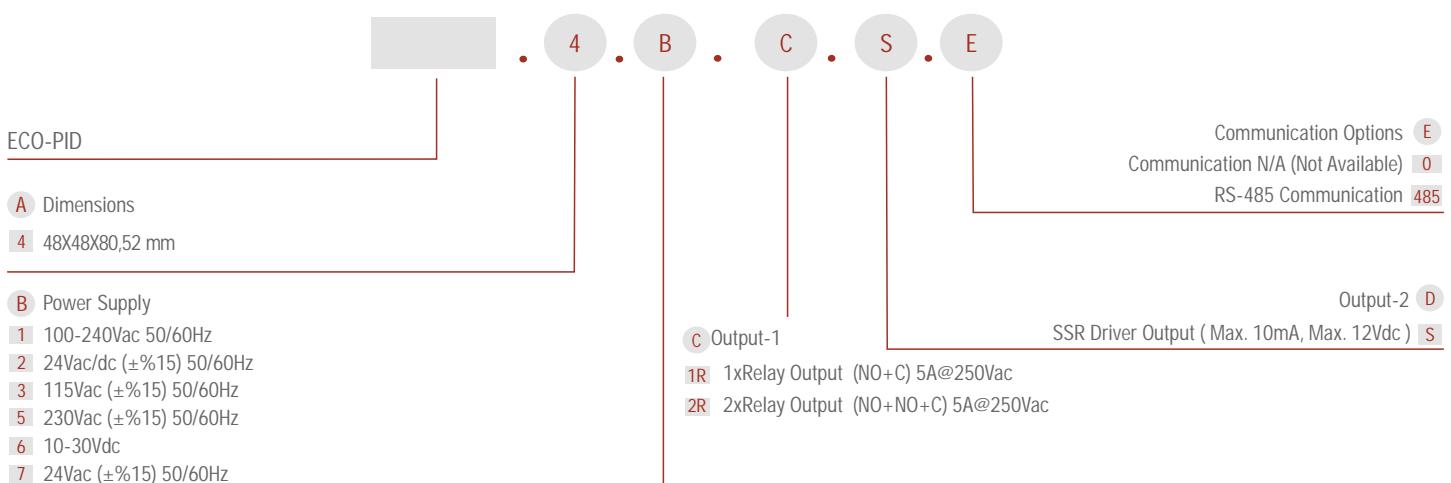

Temperature Controllers


ECO PID+



- ▶ High Resolution Sensitive PID control
- ▶ TC (J,K,R,S,T Input Types) and RTD inputs selectable by parameter
- ▶ RS-485 Modbus (RTU) communication option
- ▶ Saving and Recovery of user parameters
- ▶ Return to Factory Settings


Specifications

4 Digits Process (PV) and 4 Digits Set (SV) display
 Process input (TC, RTD)
 Programmable ON-OFF, P, PI, PD, PID control forms
 Adaptation of PID Coefficients to the system
 with Self-Tune operation (Step Response Tuning) and
 Auto-Tune (limitcycling-tuning)
 Selectable heating and cooling function
 Selectable temperature offset value
 Operation type selection with hysteresis
 Minimum pulling time adjustment for control outputs
 Password protection for programming mode

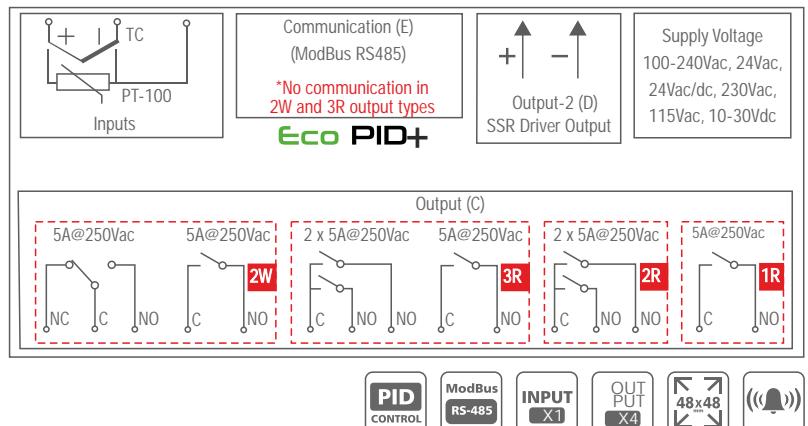

Technical Specification

Accuracy: $\pm 0.25\%$ of full scale
 Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$
 Line Compensation: Maximum 10 Ohm
 Sensor Break Protection: Upscale
 Sampling Cycle: 0.1 second

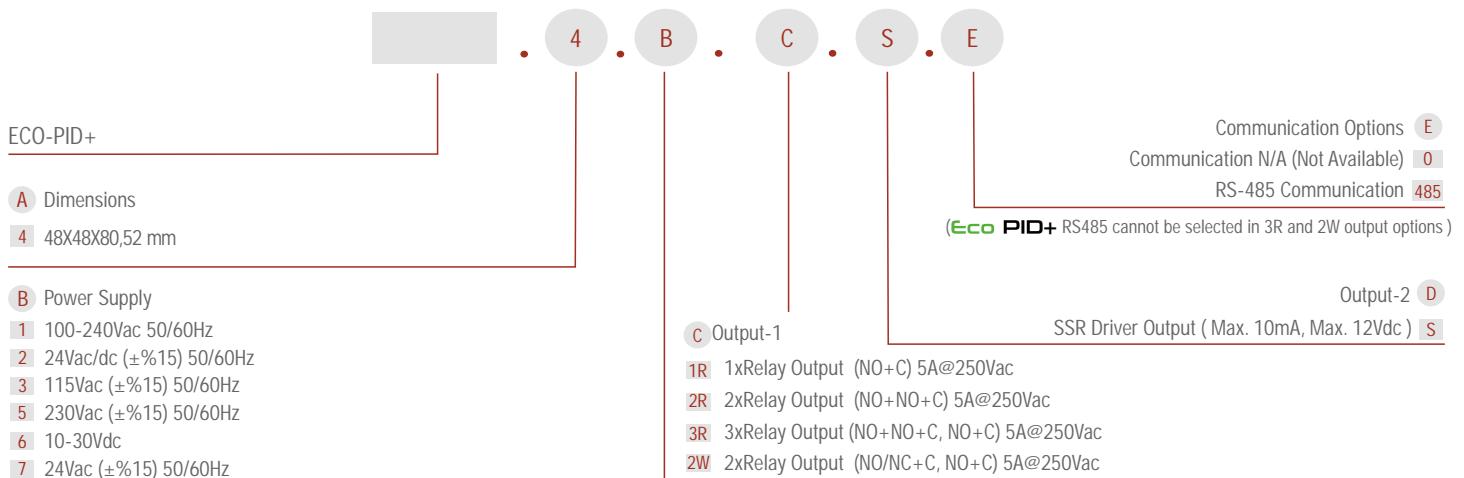



PID Hot Runner

ECO HR

CE



- ▶ High Resolution Sensitive PID control
- ▶ TC (J,K,R,S,T Input Types, PT-100) selectable by parameter
- ▶ Low Power Consumption, Energy saving and Environmentally Friendly with 2VA
- ▶ Activate 2nd Set Value by front panel
- ▶ Saving and Recovery of user parameters
- ▶ RS-485 Modbus (RTU) communication option
- ▶ Return to Factory Settings
- ▶ Digital or RS-485 input for activate the 2nd Set Value (Optional)

Specifications

3 Digits Process (PV) and 4 Digits Set (SV) display
 Process input (TC,RTD)
 Programmable ON-OFF, P, PI, PD, PID control forms
 Adaptation of PID Coefficients to the system
 with Self-Tune operation (Step Response Tuning) and
 Auto-Tune (limitcycling-tuning)
 Selectable heating and cooling function
 Selectable temperature offset value
 Operation type selection with hysteresis
 Minimum pulling time adjustment for control outputs
 Password protection for programming mode

Technical Specification

Accuracy: $\pm 0.25\%$ of full scale
 Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$
 Line Compensation: Maximum 10 Ohm
 Sensor Break Protection: Upscale
 Sampling Cycle: 0.1 second

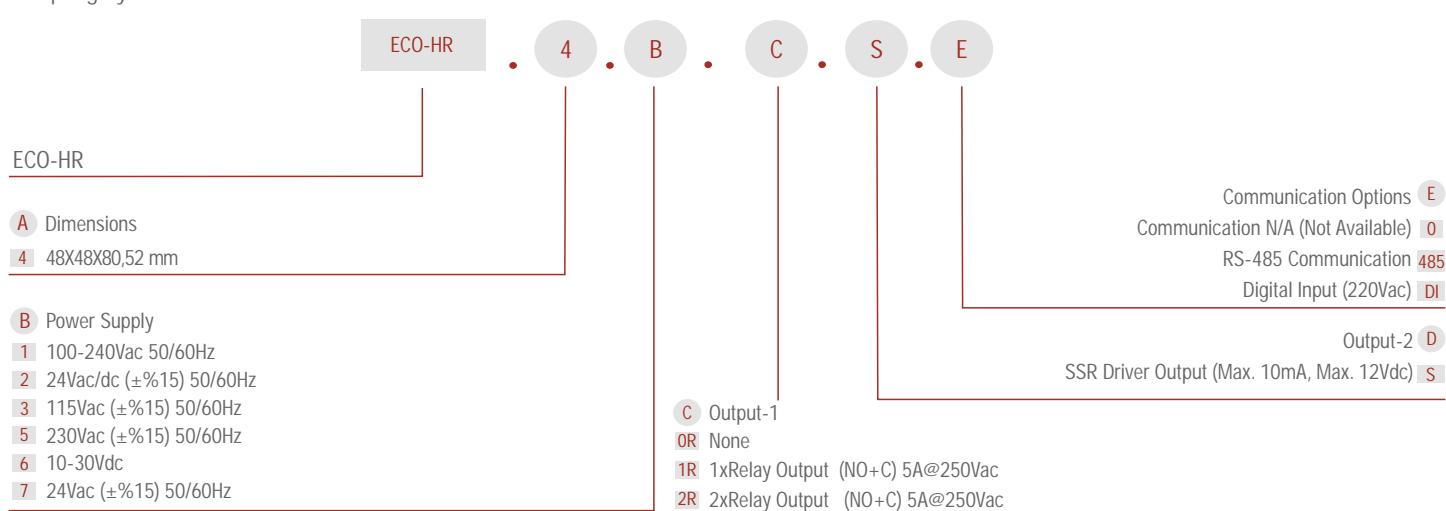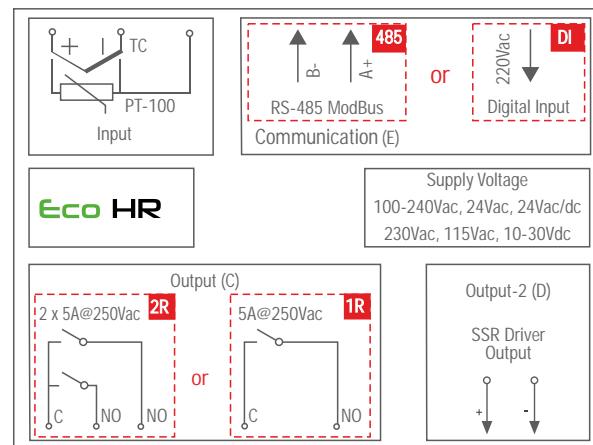

PID Process Controllers


ECO PRO+



- ▶ High Resolution Sensitive PID control
- ▶ Universal process input (TC, RTD, mVdc, Vdc, mAdc)
- ▶ 8 steps profile control (Ramp & Soak) function and start-hold-stop by using logic input module
- ▶ Saving and Recovery of user parameters
- ▶ Return to Factory Settings
- ▶ Bumpless transfer



Specifications

4 Digits Process (PV) and 4 Digits Set (SV) display
Programmable ON-OFF, P, PI, PD, PID control forms
Adaptation of PID Coefficients to the system
with Self-Tune operation (Step ResponseTuning) and
Auto-Tune (limitycycling-tuning)
Selectable heating and cooling function
Selectable temperature offset value
Operation type selection with hysteresis
Minimum pulling time adjustment for control outputs
RS-485 Modbus (RTU) communication option
Password protection for programming mode

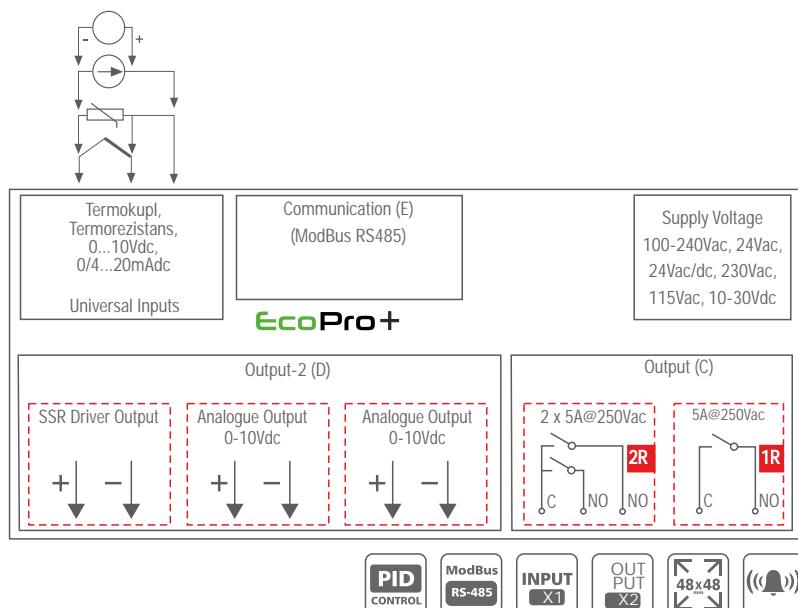

Technical Specification

Accuracy: $\pm 0.25\%$ of full scale
Cold Junction Compensation: Automatically $\pm 0.1^\circ\text{C}/1^\circ\text{C}$
Line Compensation: Maximum 10 Ohm
Sensor Break Protection: Upscale
Sampling Cycle: 0.1 second

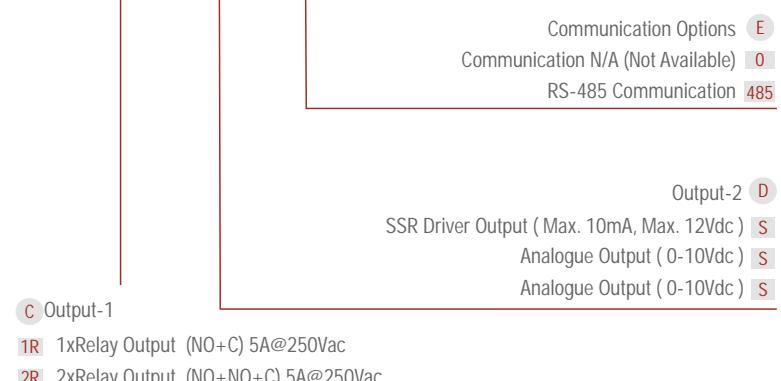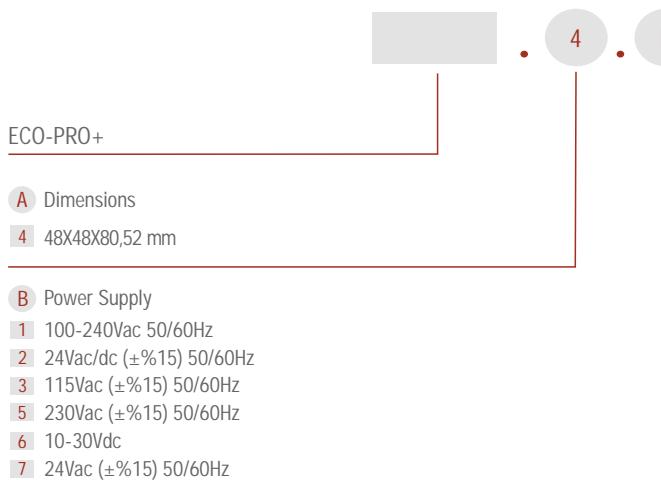



EZM-XX50




- ▶ Configurable Counter, Totalizer Counter, Batch Counter, Timer, Chronometer, Frequencymeter and Tachometer
- ▶ Operation with Automatic and Manual Reset
- ▶ Programmable Time Bases for Timer and Chronometer
- ▶ Multiplication Coefficient and Decimal Point Position

Specifications


6 Digits display
Reset, Pause and ChA-ChB Counting Inputs
Absolute or Offset Operation in Counter Function
Different Alarm Alternatives in Frequencymeter and Cycle Measuring Functions
INC, DEC, INC/INC, INC/DEC, UP/DOWN,
x1 / x2 / x4 Counting with Phase Shifting Property in Counter
RS-232 (standard) or RS-485 (optional) Serial Communication with Modbus ASCII or RTU Protocol

Technical Specification

Operating Temperature : 0...50°C
Humidity : 0-90/RH (non condensing)
Protection Class : IP65 at front, IP20 at rear

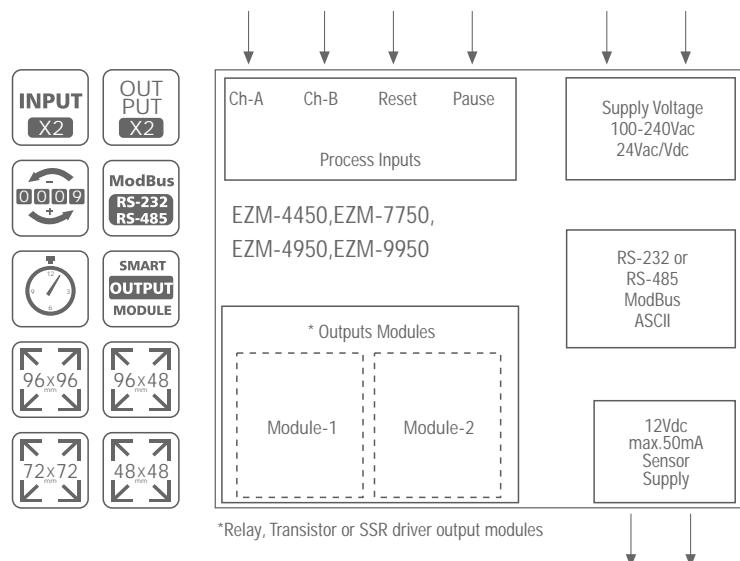

*Relay, Transistor or SSR driver output modules

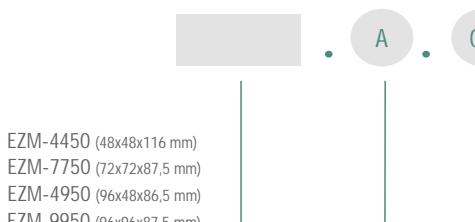

A Supply Voltage
1 100-240Vac (-15%;+10%) 50/60 Hz
2 24Vac/24Vdc (-15%;+10%) 50/60 Hz

BC Input
Counting Inputs: Ch-A, Ch-B (Switch, proximity, capacitive sensor or encoder can be connected.)
00 Sensor Type Selection: NPN or PNP selectable
Count Input Types: INC, DEC, INC/DEC, INC/INC, UP/DOWN Max. 20KHZ, x1 / x2 / x4 phase shifting (for incremental encoder) counting; Maximum 10 KHZ

Input type	V
NPN	0
PNP	1
Function	U
Counter / Totalizer Counter	0
Batch Counter	1
Timer	2
Frequencymeter / Tachometer	3
Chronometer	4
Input/Output Modules	FG / HI
None	00
Relay Output Module	01
SSR Output Module (Max.26mA @ 22Vdc)	02
Digital (Transistor) Output Module (Max.40mA @ 18Vdc)	03
Serial Communication	D
None	0
RS-232 ModBus RTU	1
RS-485 ModBus RTU	2

Counters

Single SET Programmable Counters

EZM-XX30




▶ Reset, Pause and ChA-ChB Counting Inputs

▶ Multiplication Coefficient and Decimal Point Position


Specifications

6 Digits process (PV) and 6 digits Set (SV) Value Display
Operation with 1 Set Value
NPN/PNP Type Operation
Operation with Automatic and Manuel Reset
INC, DEC, INC/INC, INC/DEC, UP/DOWN,
x1 / x2 / x4 Counting with Phase Shifting Property

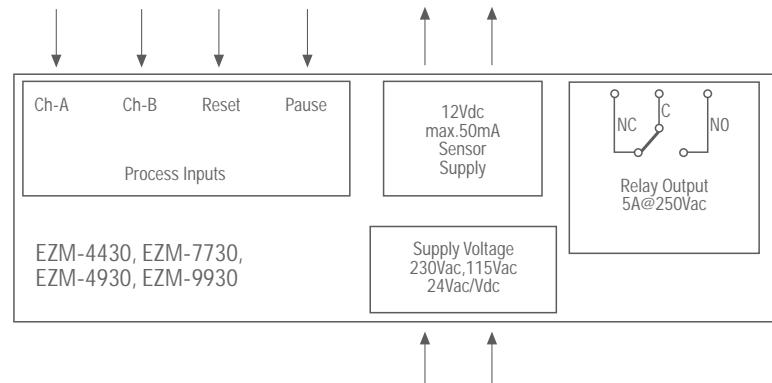

Technical Specification

Operating Temperature: 0...50 °C
Humidity: 0-90%RH (none condensing)
Protection: IP65 at front, IP20 at rear.

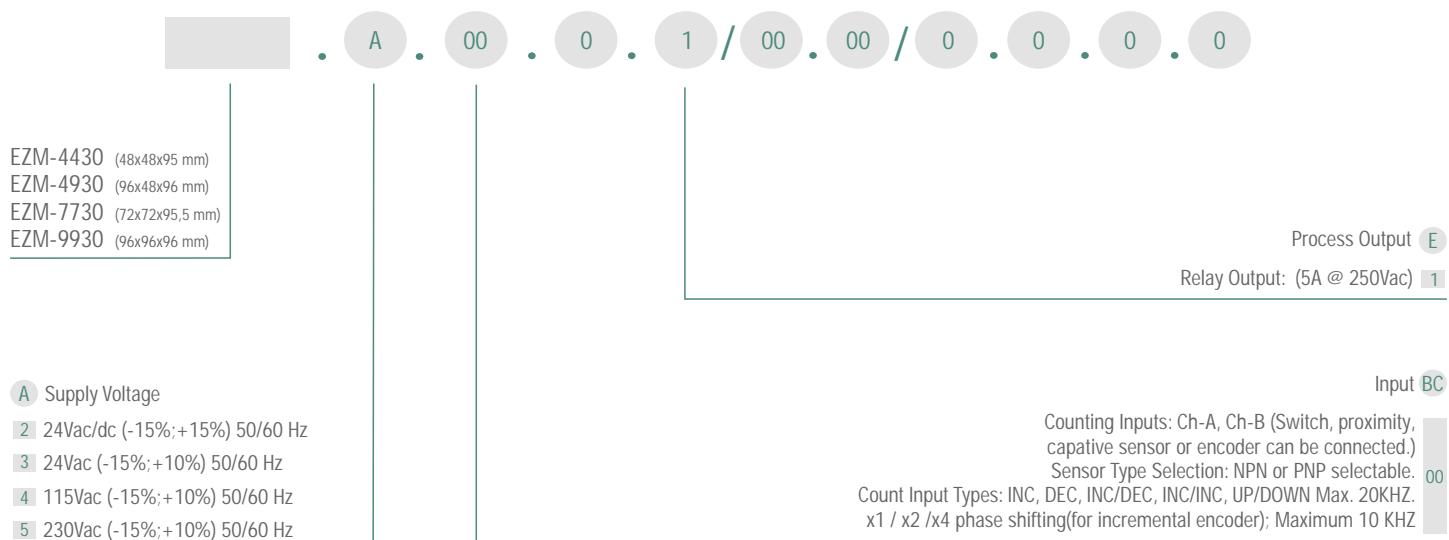

Timer Relay



EZM-3735

CE EAC

► Start and Stop Possibility by front Panel

► External Start and Pause Input

► Programmable Time Bases (Second, Minute, Hour)

► Adjustable internal buzzer according to Timer Stop status.

Specifications

4 Digits Display

Operation with One Set value

Single Contact Output for Timing control (ON /OFF)



Pause possibility by front Panel

Set value high limit boundaries


Display can be adjusted to show Second, Minute and Hour

Password protection for programming section

Having CE mark according to European Norms



Supply Voltage
100-240Vdc, 24Vac/dc,
24Vac, 115Vac, 230Vac
10-30Vdc




Technical Specification

Operating Temperature : 0...50°C

Humidity : 0-90/RH (non condensing)

Protection Class : Ip65 at front, IP20 at rear

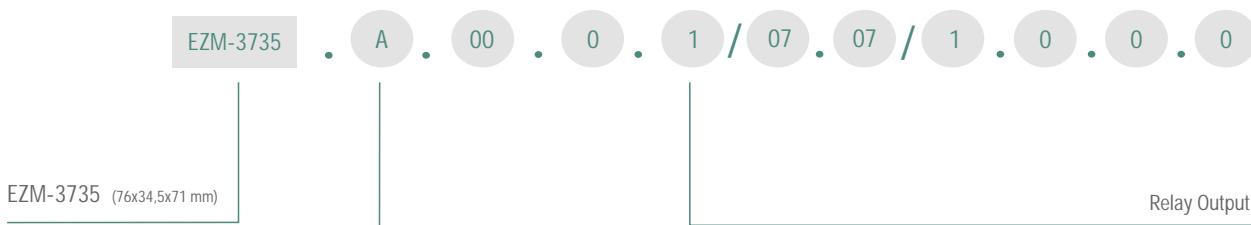

- A** Supply Voltage
 - 1** 100...240Vac 50/60Hz
 - 2** 24Vac/Vdc (-15%, +10%) 50/60Hz
 - 3** 24Vac ($\pm 15\%$) 50/60 Hz -1.5VA
 - 4** 115Vac ($\pm 15\%$) 50/60 Hz -1.5VA
 - 5** 230Vac ($\pm 15\%$) 50/60 Hz -1.5VA
 - 8** 10...30Vdc

Timer Relays

EZM-XX35




► Operation with Automatic and Manual Reset

► Programmable Time Bases (Second, Minute, Hour)

Specifications

6 Digits process (PV) and 6 Digits Set (SV) Value Display
Single Contact Output for Timing control (ON /OFF)
Operation with 1 Set Value
Reset, Pause and Start Inputs
Password protection for programming section
NPN/PNP Type Operation

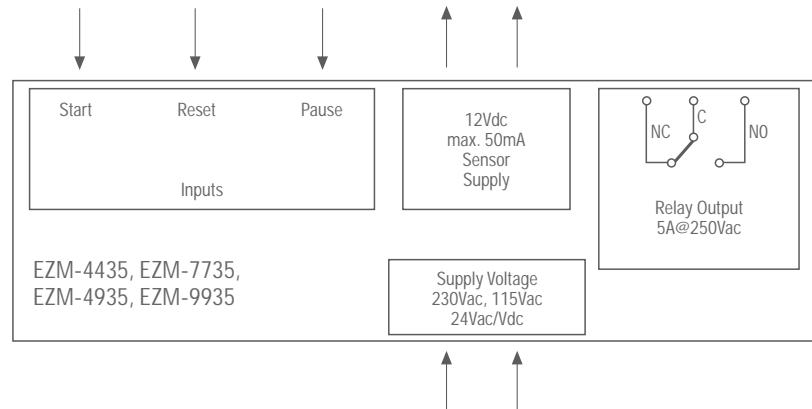

Technical Specification

Operating Temperature : 0...50°C
Humidity : 0-90/RH (non condensing)
Protection Class : Ip65 at front, IP20 at rear



EZM-4435 (48x48x95 mm)
EZM-4935 (96x48x96 mm)
EZM-7735 (72x72x95.5 mm)
EZM-9935 (96x96x96 mm)

Process Output E

Relay Output: (5A @ 250Vac) 1

- A Supply Voltage
- 2 24Vac/dc (-15%;+15%) 50/60 Hz
- 3 24Vac (-15%;+10%) 50/60 Hz
- 4 115Vac (-15%;+10%) 50/60 Hz
- 5 230Vac (-15%;+10%) 50/60 Hz

Input B

Pause Input: Switch, proximity or capacitive sensor can be connected.

Start Input: Switch, proximity or capacitive sensor can be connected.

Sensor Type Selection: It can be selected NPN/PNP




ERM 3770-N



- ▶ 0.07Hz to 10000Hz input signal
- ▶ Working with Process Set and Alarm Set value
- ▶ Set Decimal Point
- ▶ Automatic sampling (1 sec to 16 sec)


Specifications

4 Digits Display
Adjustable decimal point
Division rate
NPN or PNP input type
Alarm output
Relay or SSR driver output (It must be determined in order.)
Alarm Set value boundary
Programming mode password protection

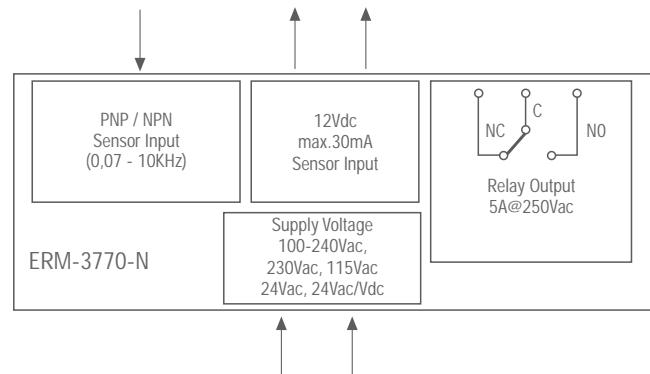

Technical Specification

Accuracy: 0.01% of scale
Counting Inputs: Ch-A, Ch-B (Switch, proximity, capacitive sensor or encoder can be connected.)
Sensor Supply Voltage: NPN or PNP selectable as
Sensor Input Type: INC, DEC, INC/DEC, INC/INC, UP/DOWN Max. 20KHZ.
x1 / x2 /x4 Counting for phase shift (for incremental encoder); Maximum 10 KHZ

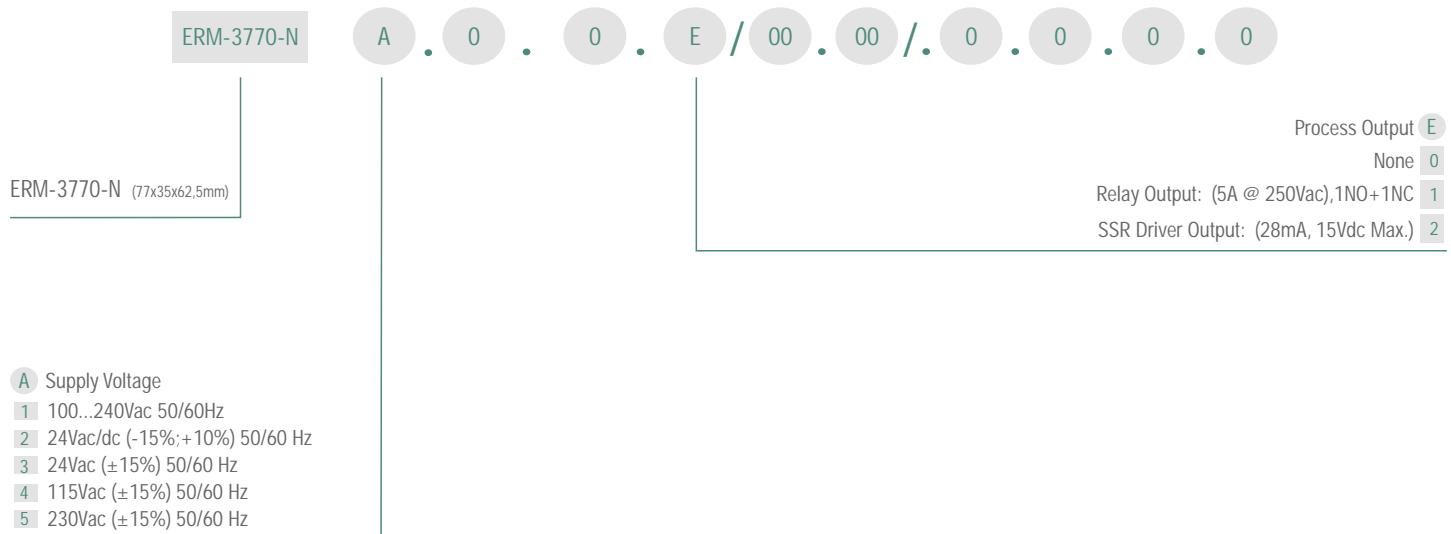

Order Code												
A	BC	D	E	/	FG	HI	/	U	V	W	Z	
00				/			/	0	0	0	0	
A Supply Voltage												
1 100...240Vac 50/60Hz	+	+	+	+	+	-	-	-	-	-	-	+
2 24Vac/Vdc (-15%, +10%) 50/60Hz	+	+	+	+	+	+	+	+	+	+	+	+
3 24Vac (-15%, -10%) 50/60Hz	-	-	-	-	+	+	+	+	+	+	+	+
4 115Vac (-15%, -10%) 50/60Hz	-	-	-	-	+	+	+	+	+	+	+	+
5 230Vac (-15%, -10%) 50/60Hz	-	-	-	-	+	+	+	+	+	+	+	+
8 10 - 30 Vdc	-	-	-	-	-	-	-	-	-	-	-	+
D Serial Communication												
0 None						+	+	+	+	+	+	+
1 RS-232 ModBus ASCII	+	+	+	+	-	-	-	-	+	-	-	-
2 RS-485 ModBus ASCII	+	+	+	+	-	-	-	-	-	-	-	-
E Process Output-1												
0 None	+	+	+	+								+
1 Relay Output	-	-	-	-	+	+	+	+	-	+	+	+
FG Modules Output-1												
00 None	+	+	+	+	+	+	+	+	+	+	+	+
01 Relay Output	+	+	+	+	-	-	-	-	+	-	-	-
02 SSR Driver Output (max. 20mA@12Vdc)	+	+	+	+	-	-	-	-	+	-	-	-
03 Digital (Transistor) Output (max. 40mA@18Vdc)	+	+	+	+	-	-	-	-	-	-	-	-
HI Modules Output-2												
00 None	+	+	+	+	+	+	+	+	+	+	+	+
01 Relay Output	+	+	+	+	-	-	-	-	+	-	-	-
02 SSR Driver (max. 20mA@12Vdc)	+	+	+	+	-	-	-	-	+	-	-	-
03 Digital (Transistor) Output (max. 40mA@18Vdc)	+	+	+	+	-	-	-	-	-	-	-	-
Specifications												
Counter	+	+	+	+	+	+	+	+	+	-	-	-
Total Counter	+	+	+	+	-	-	-	-	-	-	-	-
Batch Counter	+	+	+	+	-	-	-	-	-	-	-	-
Timer	+	+	+	+	-	-	-	-	+	+	+	+
Chronometer	+	+	+	+	-	-	-	-	-	-	-	-
Frequencymeter	+	+	+	+	-	-	-	-	-	-	-	-
Tachometer	+	+	+	+	-	-	-	-	-	-	-	+
Working with automatic and manual reset	+	+	+	+	+	+	+	+	+	+	+	-
Smart Output module system	+	+	+	+	-	-	-	-	-	-	-	-
Ch-A, Ch-B Encoder inputs	+	+	+	+	+	+	+	+	+	-	-	-
Multiplication coefficient and decimal point position	+	+	+	+	+	+	+	+	+	-	-	+
Process display	6 digits	4 digits										
SET display	6 digits	4 digits										
Start input	-	-	-	-	-	-	-	-	+	+	+	+
Reset and Pause input	+	+	+	+	+	+	+	+	+	+	+	-
Supply voltage for switch and proximity sensors	+	+	+	+	+	+	+	+	+	+	+	+
Operation with 2 Set values	+	+	+	+	-	-	-	-	+	-	-	-
Password protection for programming section	+	+	+	+	+	+	+	+	+	+	+	+
Dimension												
77x35mm DIN	-	-	-	-	-	-	-	-	-	-	-	+
48x48mm DIN 1/16	+	-	-	-	+	-	-	-	+	-	-	-
72x72mm DIN	-	+	-	-	-	+	-	-	-	+	-	-
96x48mm DIN 1/8	-	-	+	-	-	-	+	-	+	-	+	-
96x96mm DIN 1/4	-	-	-	+	-	-	-	+	-	-	+	-



⌂: Bursa Organize Sanayi Bölgesi, (Fethiye OSB Mah.)
Fethiye OSB Mah., Turkuaz Cd. No:15 16215 Nilüfer - BURSA - TÜRKİYE
☎: +90 224 261 19 00 - ☎: +90 224 261 19 12
🌐: www.emkoelektronik.com.tr